



Modeling and Characterization of Cavity Backed Circular Aperture Antenna With Suspended Stripline Probe Feed

Donghoon Chun
University of Michigan, Ann Arbor, Michigan

Rainee N. Simons,
Dynacs Engineering Company, Inc., Brook6 Park, Ohio

Linda P.B. Katehi
University of Michigan, Ann Arbor, Michigan

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized data bases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at (301) 621-0134
- Telephone the NASA Access Help Desk at (301) 621-0390
- Write to:
NASA Access Help Desk
NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076



Modeling and Characterization of Cavity Backed Circular Aperture Antenna With Suspended Stripline Probe Feed

Donghoon Chun
University of Michigan, Ann Arbor, Michigan

Rainee N. Simons,
Dynacs Engineering Company, Inc., Brook Park, Ohio

Linda P.B. Katehi
University of Michigan, Ann Arbor, Michigan

Prepared for the
2000 International Symposium on Antennas and Propagation and
USNC/URSI National Radio Science Meeting
sponsored by the Institute of Electrical and Electronics Engineers
Salt Lake City, Utah, July 16–21, 2000

Prepared under Contract NAS3–98008

National Aeronautics and
Space Administration

Glenn Research Center

Acknowledgments

This work was performed under the task High Performance Printed Antennas and funded by the Cross Enterprise Technology Development Program (CETDP) in code SM. The authors are grateful to ARO and ONR for their support.

This report is a preprint of a paper intended for presentation at a conference. Because of changes that may be made before formal publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076
Price Code: A02

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100
Price Code: A02

MODELING AND CHARACTERIZATION OF CAVITY BACKED CIRCULAR APERTURE ANTENNA WITH SUSPENDED STRIPLINE PROBE FEED

Donghoon Chun
University of Michigan
Ann Arbor, Michigan 48109-2122

Rainee N. Simons
Dynacs Engineering Company, Inc.
Cleveland, Ohio 44135

Linda P.B. Katehi
University of Michigan
Ann Arbor, Michigan 48109-2122

Abstract: The paper presents the numerically simulated input impedance of a cavity backed circular aperture antenna with suspended substrate stripline probe feed. The simulation is based on the finite element method. The results show the input impedance or the return loss as a function of the frequency with the probe dimensions as parameters. The simulated results are validated by measurements at millimeter-wave frequencies.

I. INTRODUCTION

Future space borne microwave/millimeter-wave systems in near-Earth orbits for communications, inter-satellite links and high-resolution mapping will require antennas which have high gain, high efficiency, low profile, light weight, excellent temperature stability and low cost. As the frequency of operation increases from the microwave to the millimeter-wave band, the attenuation of planar transmission lines increases due to conductor loss [1]. Consequently in planar array antennas, the feed network loss increases with frequency. Besides conductor loss, the loss of power due to surface waves is also a concern in planar arrays. The net effect of these losses is the reduction in the array gain and efficiency. An effective method to lower these losses and enhance the efficiency and gain is to construct the feed network using low loss transmission lines such as, rectangular waveguides [2], parallel plate waveguides [3], radial lines [4] or suspended substrate lines [5]. The suspended substrate line is particularly attractive because it makes use of a very thin dielectric sheet which has low loss tangent and excellent temperature stability such as, RT/duroid[®] 5880 [6]. In addition since the substrate is suspended between ground planes, the effective dielectric constant is close to that of free space and hence surface wave losses are negligibly small. Recently a cavity backed circular aperture antenna with a suspended substrate stripline feed has been demonstrated [7]. In the past this type of radiator has been analyzed using Green's function method and an expression for the input impedance has been presented [8].

The analysis presented in this paper is based on the finite element method (FEM). The analysis takes into account the effect of the rectangular opening through which the suspended stripline enters the cavity. In addition, the analysis takes into account the exact geometry of the probe in the cavity. The numerical results include the input impedance of the cavity backed circular aperture antenna with suspended stripline probe feed. The results show the variation in the input impedance or the return loss as a function of the frequency with the probe dimensions as parameters.

II. ANTENNA ELEMENT CONSTRUCTION

A cavity backed circular aperture antenna with suspended stripline feed is shown in Figure 1. The antenna element [7] consists of a thin dielectric substrate of thickness d supported between two cylindrical waveguides of axial height h_1 and h_2 . The lower waveguide is terminated in a short circuit so as to form a cavity. The radius r of the waveguide is chosen such that the dominant TE_{11} mode propagate but the next higher order TM_{01} mode is cut off. The TE_{11} mode is excited by extending the strip conductor of the suspended stripline through an opening ($a \times b$) in the wall thus forming a probe of width W_1 and length L_1 . The probe impedance is matched to the suspended stripline impedance by proper choice of W_1 , L_1 , taper length L_t and the cavity height h_2 . The antenna radiates with a linear polarization along the y -direction.

III. NUMERICAL MODEL

A schematic view of the numerical model for the cavity backed circular aperture antenna is shown in Figure 2. The cavity is excited by a narrow probe realized by extending the strip conductor of the suspended stripline through an opening in the cylindrical wall. Further to minimize the effect of step discontinuity reactance due to the difference in the width of the probe and the strip conductor on the input impedance a linear taper is used in between. The circular aperture is terminated in an isotropic absorber to simulate free space environment. The model uses tetrahedral element and edge-based basis function. Perfect electric conductors are assumed throughout the model and hence conductor losses are zero. The problem generates about 150,000 unknowns and is solved on a computer with a clock speed and memory of 400 MHz and 400 Mbytes respectively. Hence, the computation of input impedance at any frequency takes about an hour.

IV. NUMERICAL AND EXPERIMENTAL RESULTS

The computed return loss as a function of the frequency for a given set of probe dimensions is shown in Figure 3. The preliminary results show that the return loss is better than -10.0 dB (VSWR <2.0) over 2 percent bandwidth centered at about 56.0 GHz. The experimental investigation of this circuit and efforts to improve the bandwidth are in progress.

V. CONCLUSIONS

The paper presents a finite element model for the input impedance of a cavity backed circular aperture antenna excited by a suspended stripline probe feed. The computed results show the return loss as a function of the frequency for a particular probe dimensions. Initial results show that the return loss is better than -10.0 dB over 2 percent bandwidth centered at about 56.0 GHz.

References

- [1] T. Itoh, "Overview of Quasi-Planar Transmission Lines," IEEE Trans. Microwave Theory Tech., vol. 37, no. 2, pp. 275–280, February 1989.
- [2] K. Sakakibara, J. Hirokawa, M. Ando and N. Goto, "High-Gain and High Efficiency Single-Layer Slotted Waveguide Array for use in 22 GHz Band," Electron. Lett., vol. 32, no. 4, pp. 283–284, February 1996.

- [3] J. Hirokawa, M. Ando and N. Goto, "Waveguide-Fed Parallel Plate Slot Array Antenna," IEEE Trans. Antennas & Prop., vol. 40, no. 2, pp. 218–222, February 1992.
- [4] M. Ando, T. Numata, J.-I. Takada and N. Goto, "A Linearly Polarized Radial Line Slot Antenna," IEEE Trans. Antennas & Prop., vol. 36, no. 12, pp. 1675–1680, December 1988.
- [5] E. Rammos, "A Low Tolerance Dual Slot Radiator for Space and Ground Applications," 1991 IEEE Antennas and Prop. Inter. Symp. Dig., vol. 3, pp. 1599–1602, 1991.
- [6] Data Sheet RT/duroid® 5880, Rogers Corporation, Chandler, Arizona.
- [7] R.N. Simons, "A Millimeter-Wave Cavity-Backed Suspended Substrate Stripline Antenna," 1999 IEEE Antennas and Prop. Inter. Symp. Dig., vol. 3, pp. 2110–2113, 1999.
- [8] J.C. Goswami and M. Sachidananda, "Cylindrical Cavity-Backed Suspended Stripline Antenna-Theory and Experiment," IEEE Trans. Antennas & Prop., vol. 41, no. 8, pp. 1155–1160, August 1993.

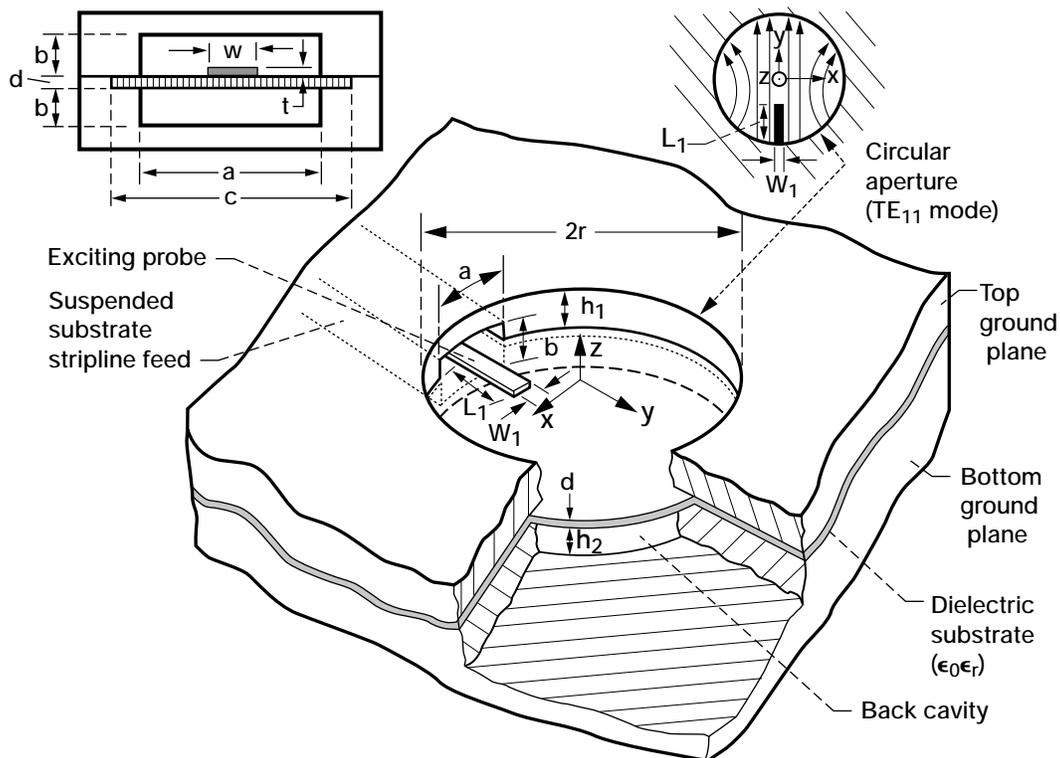


Figure 1.—Cavity backed circular aperture antenna with suspended substrate stripline (SSS) feed. The inset on the top left and right show the cross-section of the SSS and the electric field distribution for the TE_{11} mode respectively. The parameters (in inches) are $d = 0.005$, $\epsilon_r = 2.22$, $h_1 = 0.25$, $h_2 = 0.10$, $r = 0.075$, $a = 0.074$, $c = 0.09$, $b = 0.016$, $W = 0.04$, $W_1 = 0.0175$, $L = 0.06$, $L_1 = 0.066$.

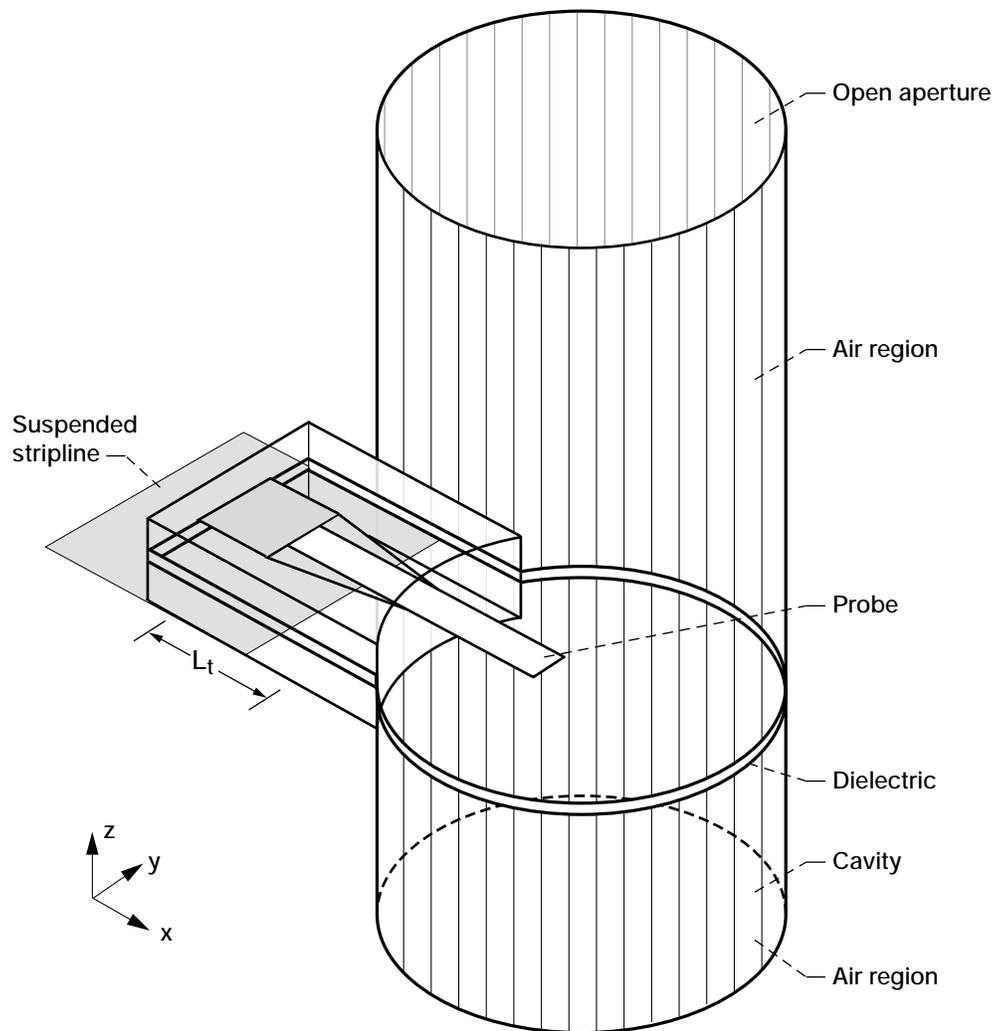


Figure 2.—Numerical model for the antenna.

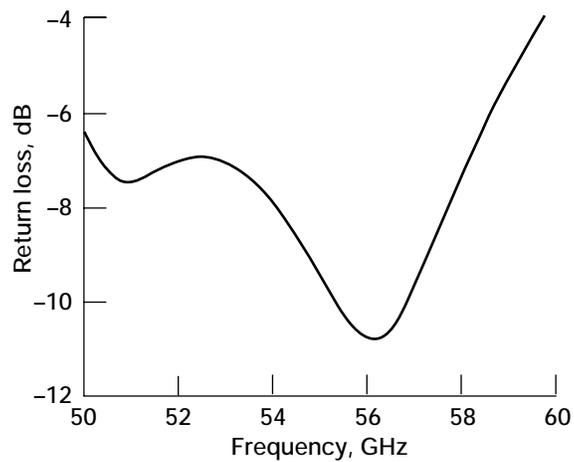


Figure 3.—Computed return loss as a function of the frequency.

REPORT DOCUMENTATION PAGE			<i>Form Approved</i> <i>OMB No. 0704-0188</i>	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE June 2000	3. REPORT TYPE AND DATES COVERED Final Contractor Report	
4. TITLE AND SUBTITLE Modeling and Characterization of Cavity Backed Circular Aperture Antenna With Suspended Stripline Probe Feed			5. FUNDING NUMBERS WU-632-6E-51-00 NAS3-98008	
6. AUTHOR(S) Donghoon Chun, Rainee N. Simons, and Linda P.B. Katehi				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Michigan Ann Arbor, Michigan 48109-2122 and Dynacs Engineering Company, Inc. Brook Park, Ohio 44135			8. PERFORMING ORGANIZATION REPORT NUMBER E-12070	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA CR-2000-209784	
11. SUPPLEMENTARY NOTES Prepared for the 2000 International Symposium on Antennas and Propagation and USNC/URSI National Radio Science Meeting sponsored by the Institute of Electrical and Electronics Engineers, Salt Lake City, Utah, July 16-21, 2000. Donghoon Chun and Linda P.B. Katehi, Radiation Laboratory, EECS Department, University of Michigan, Ann Arbor, Michigan 48109-2122; and Rainee N. Simons, Dynacs Engineering Company, Inc., 2001 Aerospace Parkway, Brook Park, Ohio 44142. Project Manager, Dennis Vano, Systems Engineering Division, NASA Glenn Research Center, organization code 7830, (216) 433-2730.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Category: 33 This publication is available from the NASA Center for AeroSpace Information, (301) 621-0390.			12b. DISTRIBUTION CODE Distribution: Nonstandard	
13. ABSTRACT (Maximum 200 words) The paper presents the numerically simulated input impedance of a cavity backed circular aperture antenna with suspended substrate stripline probe feed. The simulation is based on the finite element method. The results show the input impedance or the return loss as a function of the frequency with the probe dimensions as parameters. The simulated results are validated by measurements at millimeter-wave frequencies.				
14. SUBJECT TERMS Cavity backed aperture antenna; Suspended substrate stripline; Array antenna; Finite element method; Waveguide to suspended stripline transition			15. NUMBER OF PAGES 10	
			16. PRICE CODE A02	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	