



NASA Aeropropulsion Research: Looking Forward

Jonathan A. Seidel, Arun K. Sehra, and Renato O. Colantonio
Glenn Research Center, Cleveland, Ohio

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized data bases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at 301-621-0134
- Telephone the NASA Access Help Desk at 301-621-0390
- Write to:
NASA Access Help Desk
NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076



NASA Aeropropulsion Research: Looking Forward

Jonathan A. Seidel, Arun K. Sehra, and Renato O. Colantonio
Glenn Research Center, Cleveland, Ohio

Prepared for the
Fifteenth International Symposium on Airbreathing Engines
sponsored by the International Society for Air Breathing Engines
Bangalore, India, September 2-7, 2001

National Aeronautics and
Space Administration

Glenn Research Center

Acknowledgments

The authors would like to express their thanks to Anita D. Liang, Gregory J. Follen, Brijendra Singh, and Michael Tong for their contributions to this paper.

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100

Available electronically at <http://gltrs.grc.nasa.gov/GLTRS>

NASA Aeropropulsion Research: Looking Forward

Jonathan A. Seidel
Arun K. Sehra
Renato O. Colantonio
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Abstract

NASA has been researching new technology and system concepts to meet the requirements of aeropropulsion for 21st Century aircraft. The air transportation for the new millennium will require revolutionary solutions to meet public demand for improving safety, reliability, environmental compatibility, and affordability. Whereas the turbine engine revolution will continue during the next two decades, several new revolutions are required to achieve the dream of an affordable, emissionless, and silent aircraft. This paper reviews the continuing turbine engine revolution and explores the propulsion system impact of future revolutions in propulsion configuration, fuel infrastructure, and alternate energy systems. A number of promising concepts, ranging from the ultra-high bypass intelligent engine to fuel cell-powered distributed propulsion are also reviewed.

Introduction

The future world economy is envisioned to be truly global, where national boundaries become diffused by interdependent commerce. This vision of the future can only be realized if there is a revolutionary change in transportation systems, enabling greater mobility of people and products with improved timeliness and convenience. Propulsion and power capabilities are the foundation on which future subsonic and supersonic transports will shape the aviation landscape and establish this global conduit of commerce.

Propulsion innovations have been the fundamental driver to progress in air transportation. Enormous advances in propulsion performance and efficiency have made it possible for aircraft to travel at higher speeds over longer ranges while carrying larger payloads. This has increased capacity by orders of magnitude since the advent of air travel. The FAA and commercial sectors are forecasting another dramatic growth in commercial air transportation in

the next 10 to 25 years. Commercial air transportation will again seek and rely on advanced propulsion solutions to meet this ever-increasing public demand.

As we approach the centennial celebration of the Wright Brothers' First Flight, the challenge of the new millennium is to develop and deliver innovative, revolutionary solutions to air transport that will meet public demand. Safety, capacity, and environmental concerns remain the theme, vision and challenge for NASA and our industry partners in the 21st Century. We need to travel faster and cheaper, while improving the quality of travel and allowing aviation to expand to meet public demand. The aeropropulsion systems of the future will require operation over a wide range of flight regimes, while providing high levels of safety and reliability. They will need to be much more energy efficient throughout their flight envelope while keeping emissions of atmospheric pollutants and noise to harmless levels. In addition, they will need to be inexpensive to develop, manufacture, and operate.

Advanced aeropropulsion systems and computational research tools, as well as discrete technologies, will be the major contributors to 21st Century air transportation innovation. Revolutionary propulsion systems will enable revolutionary aircraft designs that meet the need and demand of the future.

Aeropropulsion Vision for 21st Century Aircraft Engines

NASA proposes a phased aeropropulsion research approach triggered by thresholds of technology revolutions and National needs to realize our vision for 21st Century air transportation (Figure 1). NASA will transfer high-risk research and technology from each phase to industry-compatible propulsion configurations. This will be done by compounding innovation successes from the preceding phases to enable new configurations. Revolutionary propulsion ideas will be enabled as we pursue technology

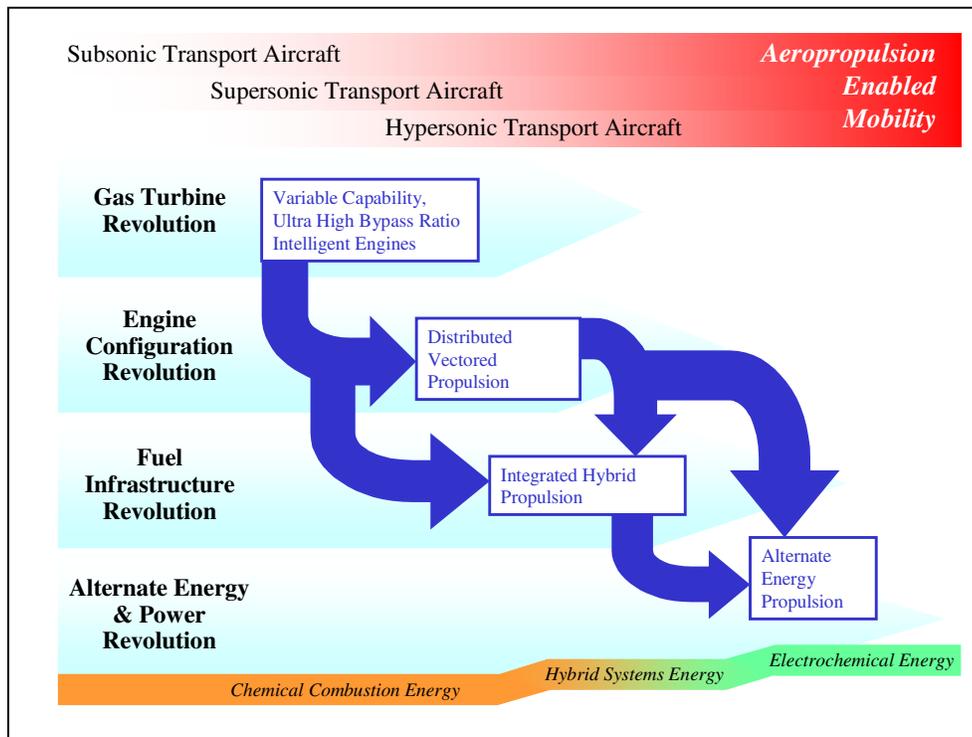


Figure 1 Propulsion System Revolutions Enabling Mobility

research that supports our extended long-term vision with the national research community.

The Gas Turbine Revolution (as characterized by Variable Capacity, Ultra High Bypass Ratio, Intelligent Engines) concentrates on component design and systems operability that result in propulsion systems that are compact, intelligent, and efficient for subsonic and supersonic transports. Active materials and adaptive controls will be an integral part of the propulsion system design. The Engine Configuration Revolution (as characterized by Distributed Vectored Propulsion systems) will focus on smart engine operations and distributed vectored propulsion systems. Distributed exhaust and engine concepts will be an integral part of advanced airframe designs. The Fuel Infrastructure Revolution (whose technologies crosscut the three future revolutions) will make possible the use of alternate fuels such as low carbon fuels, hydrogen and hybrids towards low emissions propulsion concepts. The Alternate Energy Propulsion Revolution will exploit fuel cells and other high-energy power sources towards powering emissionless, non-gas turbine propulsion concepts. Innovative technologies, propulsion components, and engine systems will maximize efficiency and performance of the next generations of subsonic and supersonic aircraft while having no adverse impact on our environment.

Variable Capability, Ultra High Bypass Ratio Intelligent Engines

Advancements in the hydrocarbon-fueled gas turbine engine are rapidly approaching the limits of integration for conventional transport aircraft. Increases in bypass ratio (BPR) enabled by high temperature, high-pressure cores have ushered in a sustained era of quiet, fuel efficient subsonic propulsion. Future improvements in commercial core specific power output are limited by the growing sensitivity to NO_x emission impacts and the physical size of the core-powered propulsor (or fan) for any given thrust-class of engine.

Historically, the first generation high bypass turbofan engines prior to about 1985 were designed to meet the energy crisis challenge. These propulsion systems introduced early 3-D aerodynamic and computer aided design, and incorporated the first generation of superalloy materials, ceramic coatings and polymer matrix composites (PMCs). The second-generation aircraft gas turbine engine, prior to about 1995, had continued emphasis on fuel-burn reduction but was also designed to meet emerging noise and emissions challenges. These higher BPR turbofan engines incorporated advanced materials for still higher cycle temperatures and pressures, which realized greater core specific-power and overall efficiency. Aiding these turbine engine

advancements was the introduction of multi-bladerow computer analysis and modeling of unsteady flow phenomena, supercomputing advancements, and the introduction of parallel processing. The current generation of turbofan engine technology research focuses on meeting an increasing diversity of applications requirements (civil, fighters, high Mach, high altitude, etc.). This research places emphasis on the environment and affordable performance gains in the wake of lost US market share and declining research budgets. The global economy and ecology are driving more physics-based modeling of the component-integrated propulsion system, with greater emphasis on reduced computational time. This design/analysis capability is presently compounding with fundamental research advancements from traditional disciplines (aerodynamics, materials, controls, etc.) to usher in a next generation of technology innovations.

The next generation turbine engine (Figure 2) will advance both fundamental technologies (those designed to increase core specific power and decrease propulsion system weight) as well as introduce a new variety of adaptable technologies. The fundamental research advancements will principally address the mounting environmental (noise and emissions), economic, and safety challenges facing present-day turbofan propulsion systems. These technologies will advance the standard Brayton-cycle turbofan concept to the limit of its performance. This necessitates new directions enabled by adaptable technologies to achieve this next revolution in propulsion systems.

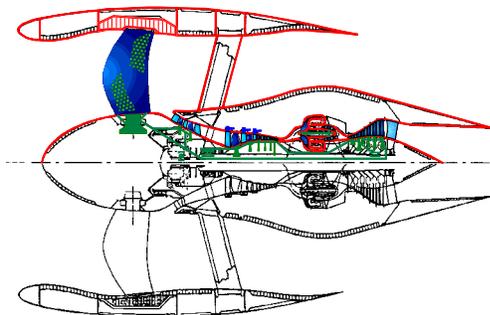


Figure 2 Variable Capability, Ultra High Bypass Ratio Intelligent Engine

The adaptable technologies principally address the challenges prompted by increasingly diverse transport mission requirements and the economic need for highly reusable/modifiable propulsion systems.

Fundamental Technologies

Fundamental new research and technology for the turbine engine will center around computational physics modeling and virtual engine testing, acoustic modeling and noise reduction technologies focused on inlet and nozzle components, alternative low emissions combustion processes and configurations, and intelligent engine operations for improved performance and safety.

Modeling: NASA Glenn Research Center is developing a computational environment for the design and analysis of any conceivable propulsion system (Lytle, 2000), called the Numerical Propulsion System Simulation (NPSS). NPSS (Figure 3) focuses on the integration of multiple disciplines such as thermodynamics, aerodynamics, structures, and heat transfer. It captures the concept of numerical zooming between 0-dimensional to 1-, 2-, and 3-dimensional analysis codes. The vision for NPSS is to create a "numerical test cell" enabling full engine simulations overnight on cost effective computing platforms. Numerical zooming between NPSS engine simulations and higher fidelity representations of the engine components (fan, compressor, burner, turbines, etc.) has already been demonstrated. This type of high fidelity system level analysis will greatly improve the capability of the engine system simulation and increase the level and value of virtual tests conducted prior to committing designs to hardware. Future physics-based modeling within each engineering discipline along with the NPSS development will enable conceptualization and utilization of the fundamental and adaptive technologies required for the next generation turbine engine and beyond.

Inlet and Nozzle: Inlet and nozzle technologies will focus on noise reduction and propulsion system operability impacts. Future physics-based acoustic models coupled with advanced CFD analysis will enable designers to strategically contour inlet and nozzle geometries for maximum performance and acoustic shielding. These advanced modeling techniques will also allow designers to capitalize on natural acoustic phenomena (such as ground reflection/dissipation of noise) to reduce the observable noise footprint of future aircraft to less than that of the surrounding community. Enhanced mixing technologies (such as chevrons and naturally-aspirating ejectors) will be optimized to passively reduce nozzle jet noise without sacrificing performance. Additional active noise suppression (such as pulsating acoustic liners) will also be employed in future inlet and nozzle systems.

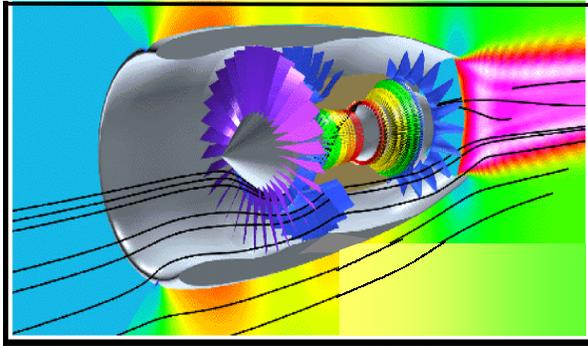


Figure 3 Numerical Propulsion System Simulation of a Large Commercial Turbofan Engine

Combustion: New combustion types and configurations will enable low-emissions operations and variability throughout the flight regime. Future detonation-wave combustion processes combining pressure rise with energy release promise greater thermal efficiency per unit weight compared to the conventional deflagration processes. Structural integrity and aerodynamic stability impacts from wave-combustors will challenge future propulsion configurations. To overcome these challenges, off-axis toroidal wave combustor configurations and wave-diffuser centrifugal compressor configurations will be employed. These configurations isolate the pulsed, unsteady wave effects from the surrounding engine components while shortening the axial length required for combustion.

Sensors and Controls: Fundamental sensors and controls research will also transform recent successes in physics-based multidisciplinary modeling into real-time propulsion health monitoring for improved safety and reduced maintenance costs. Advanced component design techniques applied to material system design strategies will promote probabilistic design for performance and life. These same techniques coupled with material-embedded nano-sensors and evolving information-technology capabilities (computational processing speed, data acquisition and dissemination, etc.) will allow for real-time engine diagnostics. This will facilitate both health monitoring and performance optimization. Designer material and fuel systems will function more autonomously from the cockpit using biologically inspired “intelligent engine” controls akin to the involuntary nervous system. This will enable event or outcome-based decisions from the voluntary cockpit control for safer aircraft operation of increasingly complex aviation systems.

Adaptive Technologies

Adaptive technologies for turbine engines will center on performance and operability, utilizing research in fluidics, structures and material system capabilities, and advanced variable cycle engine configurations. Fundamental fluidic technology will enable “virtual” aerodynamic shapes, providing inlet and nozzle area control and peak compressor and turbine efficiency operation over a wide range of flight speeds. Trailing edge blowing and circulation control for turbomachinery will provide virtual shape camber, improving off-design loading and efficiency as well as reducing wake-induced acoustics. Similar application of this technology to airfoil leading edges will likewise contribute to virtual camber changes as well as improving operability margins by reducing aerodynamic stall of high-performance, sharp edges.

Flow Management: Active and passive redistribution of boundary layer flows within the engine will have a profound adaptability effect on the overall propulsion performance and weight by minimizing mechanical actuation and associated life and leakage losses. For example, turbine flow area control through fluidics and active seals will enable re-optimization of the engine BPR between takeoff and cruise. This will reconcile design constraints for reduced takeoff emissions and improved cruise fuel-efficiency across the transport aircraft flight envelope. Computational modeling will be extremely taxed for these designs to minimize the losses associated with low Reynolds number flows for fluidics. New propulsion configuration concepts, employing reverse-flow components or concentrically configured flowpaths will benefit most from fluidics, because of the short ducting distance and natural radial migration of flow from the high-pressure core outward. Advancements in ejector design methods will also contribute the fluidic engine adaptability by exploiting natural aerodynamic aspiration rather than active energy-debit pumping of boundary layer control flow. Acoustical fluidic control of inlet and nozzle boundary layers could be teamed with actively pulsed noise attenuating liners, thereby maximizing the dual applicability of a single integrated technology.

Morphing Structures: Mechanical and structural variability will also undergo a revolution with the advent of active/passive shape-memory materials and tailored aeroelastic design capability or “morphing”. Similar in effect to the fluidic virtual shape technologies, future shape-memory materials will be employed in a variety of component areas. Inlet lip radius/ sharpness, coupled with anti-icing technology, could be made to change shape between takeoff and

cruise, enabling high takeoff airflow without compromising the high cruise efficiency and low drag afforded by a sharper inlet lip. Shape memory inlet and nozzle contraction area variability will improve engine performance and operability without the weight from mechanical actuation. Application of shape-memory materials to turbomachinery will yield camber reshaping (for loading and efficiency optimization and operability) and leading edge sharpness versus operability improvements similar to those described for fluidic virtual shaping. Research in the area of fluidic and shape-memory adaptable airfoils will also be applicable to the aircraft configuration (particularly for viscous drag reduction, trim drag reduction, and circulation control for wings and empennage). The large internal changes in engine temperature environments and speeds readily provide untapped thermal and centrifugal forces from which to team passive, structural shape control. Variable-speed gearboxes are another fertile application of shape-memory materials, providing optimum matching of engine high and low pressure spool speeds throughout the flight envelope, and maximizing the utility of the gearbox.

Adaptive Materials: Future material systems will not only be designed for their properties but also for their unique functionality. Crystalline grown metallics optimized for their application-specific grain boundary properties may contain lattice-encoded DNA-like properties. These will be capable of changing grain boundary size through active and/or passive stimuli thereby preventing component failures. Similar chemically

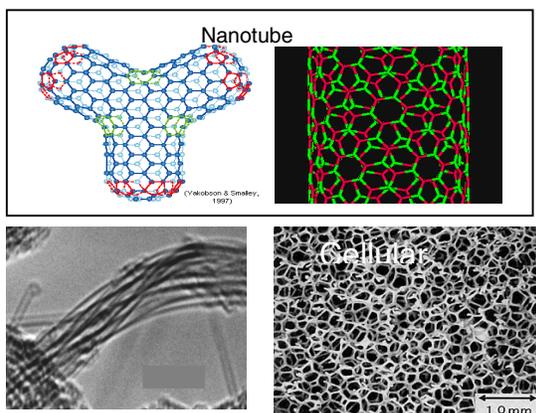


Figure 4 Nanotechnology Materials

encoded properties for coatings and compliant layers will passively provide self-healing protection against surface delamination, oxidation, and spalling. Future matrix fibers (used in MMC, CMC, and PMC

materials) will not only provide structural reinforcement but also serve as an embedded conduit for information exchange to and from the intelligent engine control, as described under Fundamentals. High conductivity fibers such as carbon nano-tubes (Figure 4) will simulate nerve ganglia to passively collect component diagnostic data. These same fibers may also be used to supply messages and adjust the configuration to optimize operating characteristics or to prevent/control component failures.

Adaptive Cycles: Thermodynamic cycle modifications and accompanying structural flowpath changes will also produce propulsion system adaptability. Bladerow by bladerow counter-rotating, concentric spool engines employing blade-on-blade technologies and advanced materials will stretch the limits of the variable cycle engine. These propulsion systems will enable the use of extremely low-weight (strength-compromised) composites by turning the turbomachinery “inside out”. This will put the blades in compressive rather than tensile stress. Bladerow counter-rotation will further reduce the required rotational spool speed per turbomachinery loading, enabling acoustically superior tip-shrouded counter-rotating fans. Other modified Brayton cycle adaptations will include off-axis cores powering ultra-high pressure combustion and serving as topping cycles for peak-power takeoff thrust without compromising the optimum cycle operation for cruise. Inter-turbine and even inter-stage turbine combustion configurations are being investigated for their large impacts on cycle adaptability over diverse missions. These modified Brayton cycles also intrinsically offer leaner combustion and reduced emissions, but challenge state-of-the-art stability practices.

The last generation turbofan propulsion resulting from the combination of both Fundamental and Adaptive technologies might be characterized as an Ultra-High Bypass configuration with a 3-spool counter-rotating concentric core and staged-inter-turbine combustion. Ultra-low emissions and noise coupled with performance, operability, and safety/durability will be governed by an autonomous intelligent control implemented through advanced material systems.

Distributed Vectored Propulsion

With the advent of the high bypass ratio turbofan, research has promoted higher temperature more thermally efficient smaller cores to power larger and larger fans for propulsion. These smaller ultra-

efficient cores will someday reach practical economic limits in manufacturing size. Similarly the larger fans will also reach limits in their manufacturability and aircraft integratability. At present the current state-of-the-art design BPR continues to grow, resulting in larger fans (eventually requiring gearing), increased aircraft integration challenges (necessitating high wing aircraft designs, etc.), and growing fan acoustic challenges. To circumvent these eventual limits, technologies affording highly integrated propulsion and airframe configurations must be pursued. Airframe-integrated propulsion and power configurations centered on distributed propulsion and capitalizing on technologies realized through the Gas Turbine Revolution will usher in the future air transportation system. The distributed propulsion concept is based on replacing the conventionally small number of discrete engines with a large number of small, mini, or micro propulsion systems as defined in the following table:

| Engine class | Micro | Mini | Small | Medium | Large |
|-----------------|-------|------------|--------------|----------------|--------|
| Max Thrust (lb) | <10 | 10 to <100 | 100 to <1000 | 1000 to <10000 | 10000< |

Distributed propulsion broadly describes a variety of configurations that can be classified into three main categories: Distributed Exhaust, Distributed Engines (including small, mini, and micro engine systems), and Common-Core Multi-Fans/Propulsors. In all three categories, the forward thrust delivered by the propulsion system remains as the conventional large engine counterpart (mass flow times exhaust velocity). Strategic distribution of the exhausting mass flow affords direct and indirect propulsion and airframe system performance benefits that can ultimately enable new aircraft missions beyond what is achievable with the state-of-the-art turbofan concepts.

In general, all three categories will produce lower thermal efficiencies using state-of-the-art technology (due principally to reduced component efficiencies from size, increased transmission losses, increased internal nozzle & inlet viscous losses, etc.). Through infusion of innovative propulsion technologies the losses associated with each individual propulsion system thrust will be mitigated and the airframe/mission benefits enabled by distributed propulsion will be fully realized. The most profitable research investment areas to mitigate these losses are those technologies that can only (or most fully) be realized in the small scale (ie, flow/circulation control through micro-turbines, foil/air bearings, concentric engines/core). The most profitable

systems benefits are those that result from the airframe configurations that are realized by these propulsion configurations (i.e. tailless propulsion controlled aircraft, noise mitigation, supersonic cruise aircraft weight & drag reductions, etc.).

Distributed Exhaust

The category of *Distributed Exhaust* entails using a central engine powerplant with a ducted nozzle(s) for strategic deployment of thrust on the aircraft (Figure 5). Distributed exhaust configurations suffer nozzle viscous losses in performance and will likely only “buy their way on” to aircraft systems exhibiting *extreme* sensitivity to low-speed lift and/or cruise drag. Therefore, distributed exhaust systems will be better suited to supersonic cruise applications, where noise-sizing for takeoff field length and sustained supersonic cruise drag are the most dominant and least reconcilable constraints.

High aspect ratio nozzles for commercial supersonic cruise vehicles promise both noise and nozzle weight reduction potential. The projected sideline noise reduction using a wing trailing edge 2-D mixer/ejector nozzle with comparatively small exhaust height may be as much as 10dB (due to increased ambient jet mixing, improved ejector internal penetration and mixing, and increased liner attenuability resulting from naturally higher frequencies and surface areas). In addition, the high aspect ratio geometrically produces a shorter nozzle for an equal nozzle pressure ratio and provides the potential for shared structural loading with the wing. This will culminate in as much as 50% equivalent nozzle weight reduction and propulsion related cruise drag. Increased low-speed lift via wing trailing edge flap blowing and thrust vectoring will also be achieved through this configuration, and reduce the required takeoff field length and affording community and approach noise reductions.

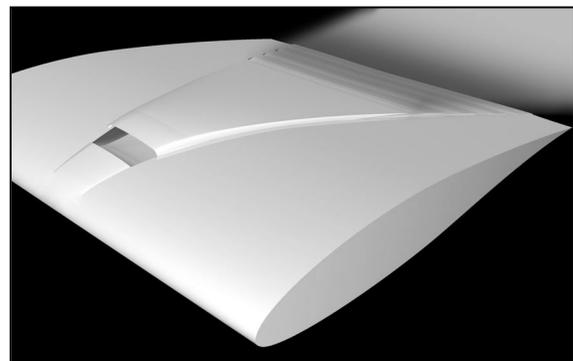


Figure 5 High Aspect Ratio Nozzle

Separate lift-nozzles for use with adaptable engine cycles in Vertical/Short Take Off and Landing (V/STOL) transonic and supersonic aircraft are another form of distributed exhaust. These configurations also utilize vectored thrust of the main engine nozzle, and exhibit a strong sensitivity to weight (due to separate nozzle ducting and wide actuation variability requirements). Hot gas re-ingestion and noise are barriers to the commercial viability of these systems. Employment of advanced ejector technologies and fluidics will mitigate these problems. High-temperature shape-control PMC nozzle structures with embedded sensors and intelligent controls will be coupled with adaptable low-pressure spool technologies to achieve minimum weight configurations and safe transition from vertical to forward flight.

Hybrid systems incorporating distributed/thrust vectored exhaust and micro-engine for flow control and actuator power are also attractive. To reduce the performance loss of the increased nozzle surface areas and increased internal flow turning, micro-engines can be incorporated for boundary layer control and cooling. This approach might passively utilize waste heat from the nozzle to power the micro-engines rather than active dedicated micro-fuel/combustors. The scavenging of waste heat will reduce the exhaust temperatures as well as increase the effectiveness of the primary distributed propulsion system. V/STOL concepts typically rely on a great deal of actuation to reconfigure the propulsion from vertical to horizontal flight. The micro-engine could further be used as sources of remote power for the actuators (thereby decreasing their weight). The micro engines might also be configured to facilitate virtual shape control through fluidic “reshaping” of the primary nozzles. This reduces or eliminates mechanical actuation while reducing internal viscous losses and waste heat.

Distributed Engines

The category of *Distributed Engines* encompasses decentralized propulsion systems and utilizes separate smaller powerplants strategically deployed over the aircraft. Examples of this type of distributed propulsion might include small or mini engines (perhaps General Aviation sized) deployed across the wingspan, or micro-turbine engines (Figures 6 and 7) embedded in the aircraft surface for flow/circulation-control and thrust. Severe performance penalties manifest in mini-engine systems are principally due to boundary layer effects of the fluid being on the same geometric scale as the propulsion system. The challenge of manufacturing tolerances that can be economically observed in these engines also severely

impacts their performance and cost. Therefore mini and micro engine propulsion must “buy its way on” the aircraft. It must afford greater benefits in other areas, such as noise and drag reduction, or by enabling a superior integrated aircraft/engine system.

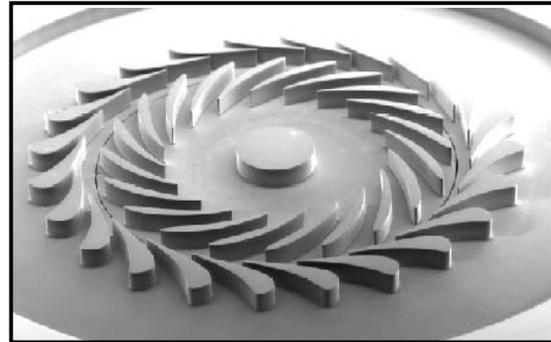


Figure 6 Radial Inflow Turbine of a Micro Engine

Laterally distributed engines will afford similar aerodynamic and acoustic benefits as those described for the high aspect-ratio wing trailing edge nozzle. Additional aircraft integration of supporting fluidic technologies using distribution engines could provide more dramatic transport mission impacts.

As much as 3-5% total aircraft fuel burn reduction might be realized from boundary layer ingestion employing small to mini engine distributed propulsion. This performance benefit may be enhanced in a hybrid system utilizing micro engines to energize the low-momentum boundary layer flow. This benefit can only be realized if the micro engine fuel consumption is low (again scavenging of waste heat would be advantageous as described by the Distributed Exhaust concept). Because of their small size, extremely high specific-strength composite materials may be used in small and mini engines with less statistical failure due to defects. The reduced size allows practical, cost-effective manufacturing of these advanced-material structures. Success of the small and mini engine propulsion deployed laterally across the wing is dependent on exploiting technologies that are best realized in the reduced sized.

Micro engines themselves can provide distributed propulsion and exhibit large thrust to weight potential. Because of their size, low Reynolds number fluid effects, engine manufacturing tolerances and corresponding impacts on seals and clearances, 3-D turbomachinery shapes, and combustion efficiency are primary technical challenges for these propulsion systems. Currently, parts at the micro-scale can only be produced in two

dimensions, resembling extruded parts. This efficiency limitation on the rotating components will be overcome with material and manufacturing technologies. These will enable three-dimensional shaping of airfoils and allowing new micro-scale engine configurations with reduced stress concentrations inherent in the current two-dimensional prototypes. Other factors affecting the structural/mechanical design of these micro-engines are the typically high rotational speeds, which may exceed 2 million RPMs. These high speeds are achievable due to reduced-scale inertial loads, but will demand non-lubricated air-bearings to surpass the common modes of failure observed in research prototypes.

Though the physical engine scale is decreased, the chemical reaction times remain constant and will require technology innovation to regain lost combustion efficiency. A very general rule for mini- and micro-engines is that both specific fuel consumption (SFC) and thrust-to-weight ratio increase as thrust and size decrease. To become a viable primary propulsion source, SFC reductions to near current macro-engine levels must accompany the increased thrust-to-weight ratios already achievable in mini and micro engines.

Distributed engine concepts will enable a variety of attractive airframe configurations affording both performance and operational benefits. Large engine production rates, lower development cost and cycle time, and line-replaceable-unit elimination of on-the-wing engine maintenance could reduce the life cycle cost by as much as 50%. Aircraft safety will be enhanced through engine redundancy and semi-redundant propulsion control of the aircraft. Dual use of the airframe structure will dramatically reduce the overall system weight, and afford holistic system noise reduction opportunities beyond those attainable with discrete engines. Principle technologies that will afford the greatest potential for realizing micro engine propulsion success include: innovative combustion techniques, processing of SiC and other advanced micro engine material for improved 3D designs, and integral autonomous controls coupled with sub-micro sensors assuring engine array reliability.

Common-Core Multi- Fans/Propulsors

The category of *Common-Core Multi-Fans/Propulsors* entails the packaging of multiple thrust fans powered by a central engine core (Figure 7). The advantage of these configurations is that they provide increased BPR engine cycle efficiency without necessitating radical airframe changes (such

as high wing designs) to accommodate a single large turbofan engine. The principle challenges of this approach are power transmission weight and losses. These challenges may be somewhat mitigated by the variable gearbox technologies previously developed under the Gas Turbine Revolution, or by employing blade-on-blade manifolded tip-turbines on the fans. These challenges could also be circumvented using direct-drive tandem fans (i.e. axially aligned fans with separate inlets for and aft of the common core) rather than the side-by-side configuration. Multi-fan cores will require innovative separate inlets to realize

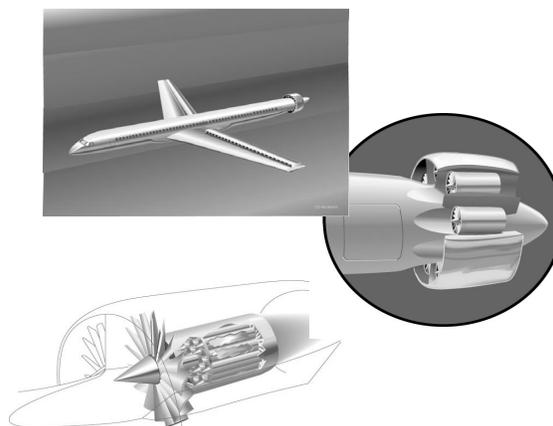


Figure 7 Distributed Mini-Engines for Propulsion Controlled Aircraft

their full BPR and aircraft integration benefit. This will require lightweight structures and possibly flow control to minimize weight and inlet performance losses.

The commonly shared performance challenges associated with all forms of distributed propulsion (low-Reynolds number flows, boundary-layer interactions, and fuel management systems) will be surpassed during this research phase using those technologies and discipline capabilities (aerodynamic, mechanical, materials, structures, manufacturing, etc.) outlined for the Gas Turbine Revolution. The highly integrated Distributed Vectored Propulsion systems for future subsonic and supersonic transports will incorporate V/STOL and Propulsion Controlled Aircraft (PCA) capabilities, and capitalize on intelligent, self-healing properties.

Alternate Energy Propulsion

While the timing remains debatable, the 21st Century will almost assuredly see the emergence of an all-electric economy. In this era, electricity will be the common currency. It will be produced, stored,

converted and consumed as other exchange medium are today. Preceding this inevitable end is the likelihood of the hydrogen-fuel economy. The ever-increasing global energy consumption rate for electric ground power and the transportation industries will continue to drain global reserves of crude oil which will have even greater environmental emissions impacts. Depletion of crude oil reserves and the associated \$/barrel price increase will invoke the economic practicality of refining new oil resources (from shale oil for example). This will sustain the hydrocarbon fuel economy well into the 21st Century but at a significantly more tenuous economic level. Global environmental impacts from hydrocarbon emissions (predominantly the greenhouse gas CO₂) will likely accelerate the introduction of cleaner alternative energy sources and more efficient utilization systems for both the ground power and transportation industries.

While nuclear energy seemingly remains the next ground power alternative, the transportation industry must practically constrain itself to other alternatives in maintaining a safe public-access environment. The transportation industry energy alternative will include low-carbon fuels and additives, hydrogen fuel, stored electrochemical, and electromechanical energy sources. Future 21st Century aeropropulsion systems and aviation systems must align to best utilize these future available energy sources. The cost associated with infrastructure changes and the sustained use of legacy aviation systems logically demands a transition period as new energy sources are introduced. Hybrid propulsion systems will be required in order to meet the challenges of transition and timely introduction of fledgling new power systems.

Low-carbon fuels and performance-enhancing or emissions-blocking additives will also contribute to the Turbine Engine Revolution. In situ additives will lessen airport fuel infrastructure changes and may be employed strategically to meet mission needs (like a biologically inspired adrenaline for peak power propulsion needs). Dual fuel hybrids, while yielding chemically more efficient systems, are a far less attractive alternative because of airport infrastructure burdens and increased engine-related operating costs.

A global hydrogen consumption rate for future power demands a practical, cost effective production rate. This implies hydrogen production from water, using a net-positive (and as yet undetermined) energy means. Safety issues (whether real or perceived) will also govern the production, distribution, and storage of hydrogen. Complexities associated with hydrogen

production and densification compounded by safety issues will likely result in centralized “refineries”. These will be similar to present-day hydrocarbon fuel refineries, despite the global availability of water. Furthermore, energy storage and consumption by the majority of the non-aviation transportation industry (e.g. automotive) will likely be from distributed electricity rather than directly from hydrogen. The aviation transportation segment is the only possible exception to the electric currency model. This is due to large takeoff power requirements favoring hydrogen combustion systems over fledgling electrochemical systems on a per weight basis. Airports may therefore require on-site handling of hydrogen. Early acceptance of hydrogen at controlled-access airport facilities will also promote the introduction of hybrid combustion/electric propulsion such as the gas-turbine/fuel-cell.

Recent advances in fuel cell technology and electrical component power densities, promoted by automotive and other transportation sectors, will eventually displace combustion-based propulsion in the aviation industry. In summary, the 21st Century will see an environmental-inspired revolution in the transportation system from hydrocarbon combustion power to electric power. Possibly hydrogen fuel and hybrid combustion/electric systems may bridge the transitions.

Fuel Cells: Fuel cells are becoming a viable option for small aircraft propulsion and APUs and hold future promise for large-scale commercial aircraft (Figure 8). Doubling of fuel cell power densities can be achieved in the next five years. This would make electrically powered light general aviation aircraft possible with no performance penalties compared to their conventionally powered counterparts. Such a power density would also make fuel cell APUs for larger aircraft viable. A five-fold increase in fuel cell power density would enable electrically powered regional/commuter size aircraft. A ten-fold increase would enable electrically powered large commercial passenger aircraft. The benefits of fuel cell powered aircraft are very low to zero emissions, simpler more reliable power and propulsion systems providing increased safety and lower maintenance costs; and greatly reduced noise from the power generator portion of the propulsion systems. Water is the only emission from proton exchange membrane (PEM) fuel cells, and must be eliminated (ejected) or accumulated/stored on the aircraft during flight (Figure 9).

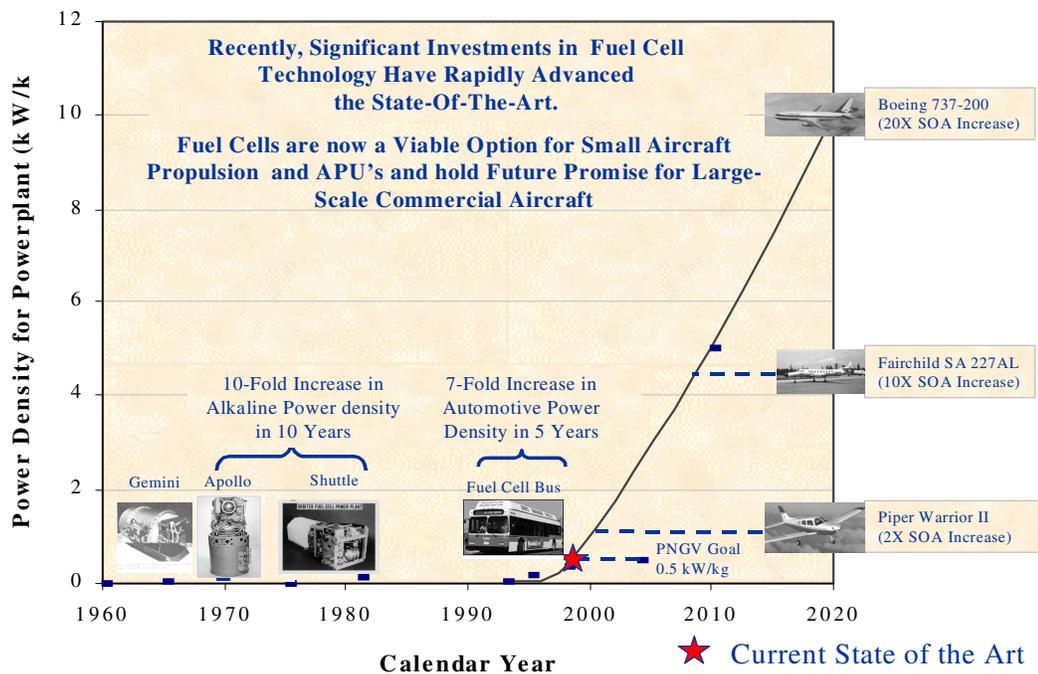


Figure 8 Potential Fuel Cell Evolution Towards Meeting Future Aircraft Transportation Needs

Capitalizing on the micro-manufacturing technologies characterized for Distributed Vectored Propulsion, micro-fuel cells and other electrochemical and pure electric storage devices (such as super batteries and capacitors) will be made

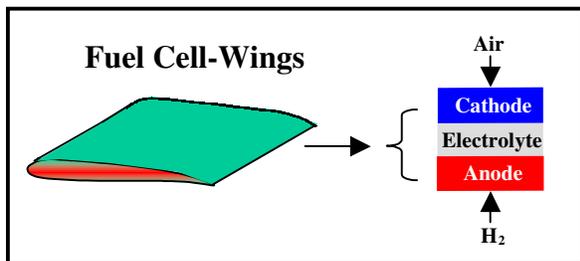


Figure 9 Simplified Fuel Cell Schematic for Wing Structure

small enough and in sufficient quantity as to allow viable all-electric propulsion. These devices will be integrated within the aircraft, taking full advantage of structural load sharing and dual-functioning systems (e.g. distributed propulsion and controls). These and other electrical components (such as high-temperature superconductors) will benefit from the ever-improving electronics industry in terms of their capability and affordability. Further superconductivity advancements in the later 21st

Century may introduce propulsion-controlled flowfield capability, enabling practical high field-strength magnets and use of unseeded-MHD for aircraft propulsion lift/thrust.

The electrically-powered subsonic transports of the future will likely be powered by small, distributed motors and fans. Similar in configuration to the wing-span distributed engines, these configurations will utilize remote fans and motors to achieve forward propulsion, and may be coupled with blown wing/flaps for high lift at takeoff. The primary advantage of these configurations is the use of a centralized, highly efficient core power unit. This may be in the form of fuel cells or centralized gas turbine Auxiliary Power Units (APUs). Electric power transmission to the remote fans is a safer more efficient approach than independent distributed fuel delivery systems (as would be utilized by the distributed engines). In the case of the APU configuration, the excess APU power could also be used in flight to meet the increasing passenger/aircraft demand for electric power and communications. In the case of multiple side-by-side fans sharing a common 2D wing integrated inlet, the benefits of boundary layer ingestion (previously discussed) may also be realized. The primary challenges for this type of propulsion will be the motor weight (many small motors with independent

structures (inefficient power conversion density) versus fewer, larger heavy motors).

Variable speed motors, leveraging the adaptive engine and controls from the Gas Turbine Revolution and the distributed fans from the Engine Configuration Revolution, will be produced from lightweight superconducting technologies born of the Alternate Energy & Power Revolution. The culmination of these and other contributing technologies in a single adaptive system will power a variety of future transport aircraft, while assuring safe environmental 24-hour operation.

Summary

Propulsion system advances have been the fundamental drivers toward the progress made in air transportation and will continue into the 21st Century. Enormous advances in propulsion performance, emissions and efficiency have made it possible for aircraft to travel at higher speeds safely over longer ranges. Over the last ten years NASA, working with other federal agencies and industry partners, have

developed aeropropulsion technologies that when fully implemented will reduce aircraft emissions by 70%, engine noise levels by 6 dB and improved fuel consumption by 15%. To continue this trend NASA has identified a series of propulsion system technology revolutions that will be essential to meet the challenge of 21st Century commercial air transportation. Future propulsion systems have been presented including the high bypass ratio, variable capability intelligent engines, distributed vectored propulsion systems based on micro engines and fuel cell powered mini-fans. These advanced propulsion systems hold the potential to enable continued improvements in performance and emissions required to achieve the vision of an affordable, emissionless, and silent aircraft.

References

Lytle, J. K., Follen, G. J., Naiman, C. G., Evans, A. L., Veres, J. P., and ET. AL., 1999 Numerical Propulsion System Simulation Industry Review, NASA/TR 209795, September 6, 2000.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

| | | | |
|--|---|---|-----------------------------------|
| 1. AGENCY USE ONLY (<i>Leave blank</i>) | 2. REPORT DATE July 2001 | 3. REPORT TYPE AND DATES COVERED Technical Memorandum | |
| 4. TITLE AND SUBTITLE NASA Aeropropulsion Research: Looking Forward | | 5. FUNDING NUMBERS WU-910-30-11-00 | |
| 6. AUTHOR(S) Jonathan A. Seidel, Arun K. Sehra, and Renato O. Colantonio | | | |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191 | | 8. PERFORMING ORGANIZATION REPORT NUMBER E-12922 | |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001 | | 10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-2001-211087 ISABE-2001-1013 | |
| 11. SUPPLEMENTARY NOTES Prepared for the Fifteenth International Symposium on Airbreathing Engines sponsored by the International Society for Air Breathing Engines, Bangalore, India, September 2-7, 2001. Responsible person, Renato O. Colantonio, organization code 2000, 216-433-6370. | | | |
| 12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Categories: 07 and 03 Available electronically at http://gltrs.grc.nasa.gov/GLTRS This publication is available from the NASA Center for AeroSpace Information, 301-621-0390. | | 12b. DISTRIBUTION CODE | |
| 13. ABSTRACT (<i>Maximum 200 words</i>) NASA has been researching new technology and system concepts to meet the requirements of aeropropulsion for 21st Century aircraft. The air transportation for the new millennium will require revolutionary solutions to meet public demand for improving safety, reliability, environmental compatibility, and affordability. Whereas the turbine engine revolution will continue during the next two decades, several new revolutions are required to achieve the dream of an affordable, emissionless, and silent aircraft. This paper reviews the continuing turbine engine revolution and explores the propulsion system impact of future revolutions in propulsion configuration, fuel infrastructure, and alternate energy systems. A number of promising concepts, ranging from the ultrahigh bypass intelligent engine to fuel cell-powered distributed propulsion are also reviewed. | | | |
| 14. SUBJECT TERMS Propulsion; Turbine; Engines | | 15. NUMBER OF PAGES 17 | |
| | | 16. PRICE CODE | |
| 17. SECURITY CLASSIFICATION OF REPORT Unclassified | 18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified | 19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified | 20. LIMITATION OF ABSTRACT |