

IAC-02-1.5.02

**Durability Issues for the Protection of
Materials From Atomic Oxygen Attack
in Low Earth Orbit**

Bruce Banks

NASA Glenn Research Center

Cleveland, OH

Mary Lenczewski

Ohio Aerospace Institute

Brook Park, OH

Rikako Demko

Cleveland State University

Cleveland, OH

53rd International Astronautical Congress

The World Space Congress—2002

October 10–19, 2002/Houston, TX



Durability Issues for the Protection of Materials From Atomic Oxygen Attack in Low Earth Orbit

Bruce Banks
Glenn Research Center, Cleveland, Ohio

Mary Lenczewski
Ohio Aerospace Institute, Brook Park, Ohio

Rikako Demko
Cleveland State University, Cleveland, Ohio

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at 301-621-0134
- Telephone the NASA Access Help Desk at 301-621-0390
- Write to:
NASA Access Help Desk
NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076



Durability Issues for the Protection of Materials From Atomic Oxygen Attack in Low Earth Orbit

Bruce Banks
Glenn Research Center, Cleveland, Ohio

Mary Lenczewski
Ohio Aerospace Institute, Brook Park, Ohio

Rikako Demko
Cleveland State University, Cleveland, Ohio

Prepared for the
53rd International Astronautical Congress
cosponsored by the International Astronautical Federation (IAF), the International
Academy of Astronautics (IAA), and the International Institute of Space Law (IISL)
Houston, Texas, October 10–19, 2002

National Aeronautics and
Space Administration

Glenn Research Center

Trade names or manufacturers' names are used in this report for identification only. This usage does not constitute an official endorsement, either expressed or implied, by the National Aeronautics and Space Administration.

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100

Available electronically at <http://gltrs.grc.nasa.gov>

DURABILITY ISSUES FOR THE PROTECTION OF MATERIALS FROM ATOMIC OXYGEN ATTACK IN LOW EARTH ORBIT

Bruce Banks
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135
Fax: 216-433-2221
E-mail: Bruce.Banks@grc.nasa.gov

Mary Lenczewski
Ohio Aerospace Institute
Brook Park, Ohio 44142
Fax: 216-433-2221
E-mail: Mary.Lenczewski@grc.nasa.gov

Rikako Demko
Cleveland State University
Cleveland, Ohio 44115
Fax: 216-433-2221
E-mail: Rikako.Demko@grc.nasa.gov

ABSTRACT

Low Earth orbital atomic oxygen is capable of eroding most polymeric materials typically used on spacecraft. Solar array blankets, thermal control polymers, and carbon fiber matrix composites are readily oxidized to become thinner and less capable of supporting the loads imposed upon them. Protective coatings have been developed that are durable to atomic oxygen to prevent oxidative erosion of the underlying polymers. However, the details of the surface roughness, coating defect density and coating configuration can play a significant role as to whether or not the coating provides long duration atomic oxygen protection. Identical coatings on different surface roughness surfaces can have drastically different durability results. Examples and analysis of the causes of resultant differences in atomic oxygen protection are presented. Implications based on in-space experiences, ground laboratory

testing and computational modeling indicate that thin film vacuum-deposited aluminum protective coatings offer much less atomic oxygen protection than sputter-deposited silicon dioxide coatings.

INTRODUCTION

The use of atomic oxygen protective coatings applied over conventional polymers that have traditionally been used in space has been the primary approach to date to achieve atomic oxygen durability in space. Metal atoms or metal oxide molecules have been used extensively for the protective coating materials. Typically silicon dioxide, fluoropolymer filled silicon dioxide, aluminum oxide, or germanium have been sputter deposited on polymers to provide atomic oxygen protection. For example, the large solar array blankets on International Space Station have been coated with 1300 Å of SiO₂ for atomic oxygen protection.¹

IN-SPACE PROTECTIVE COATING EXPERIENCES

European Retrievable Carrier (EURECA)

The EURECA spacecraft, which was deployed into low Earth orbit on August 2, 1992 and retrieved on June 24, 1993, was exposed to an atomic oxygen fluence of approximately 2.3×10^{20} atoms/cm².² To assist in its retrieval, the spacecraft used two thin adhesively mounted acrylic optical retroreflectors for laser range finding. Prevention of atomic oxygen attack of the retroreflector surfaces, which would have degraded the specularity of the reflectance, was accomplished by coating the retroreflector surface with a ~ 1000 Å thick film of sputter deposited SiO₂ filled with 8 percent fluoropolymer (by volume). The LEO exposed and retrieved retroreflector was inspected and optically characterized.

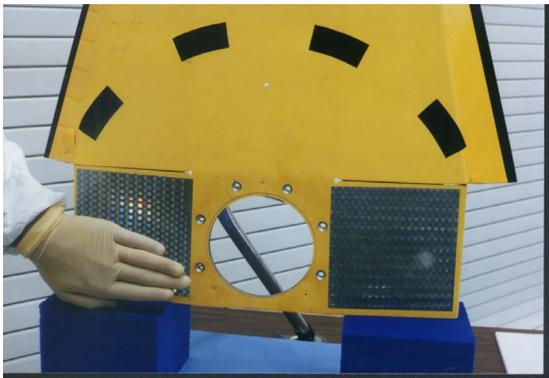


Figure 1. – EURECA retroreflectors after retrieval close up and during illumination.

The results indicated that the protective coating provided excellent protection and the retroreflector performed as planned except in a small 3 cm patch where the protective coating was accidentally abraded prior to flight as a result of handling during preflight ground integration.³ Figure 1 shows a close up picture of the retroreflectors as well as their appearance during illumination after retrieval.

International Space Station (ISS) Retroreflectors

ISS retroreflectors, which serve in a similar role as the EURECA retroreflectors, employ a glass corner cube retroreflector that is housed in a 10 cm diameter Delrin[®] 100 polyoxymethylene mount. To prevent atomic oxygen attack of the Delrin[®], the machined polymer surfaces were coated by the same processes, in the same facility and with the same ~ 1000 Å thin film of sputter deposited 8 percent fluoropolymer-filled SiO₂ that was used for the EURECA retroreflector. Several of these retroreflectors have been mounted on the external surfaces of the ISS structures at various locations that are exposed to LEO atomic oxygen. Figure 2 shows a close up of one of the coated retroreflectors prior to use on ISS in space as well as a photograph from space of a retroreflector after attack by atomic oxygen.

It is clear from the in-space photograph that the coating was only partially attached allowing direct atomic oxygen attack of the unprotected areas.

ISS Photovoltaic Array Blanket Box Covers

Prior to deployment, the ISS photovoltaic (PV) arrays were folded into a box that allows the array to be compressed in a controlled manner against a cushion of open pore polyimide foam that was covered with a 0.0254 mm thick aluminized Kapton[®]

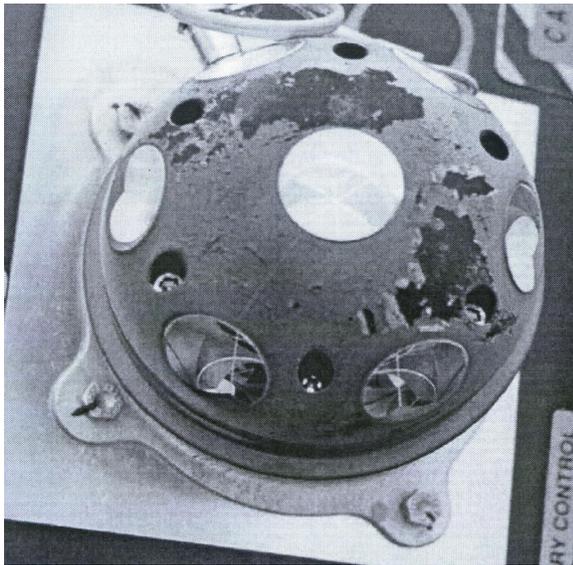


Figure 2. – ISS retroreflectors prior to launch and after atomic oxygen attack during use in space on ISS.

blanket. The Kapton[®] was coated on both surfaces with 1000 Å of vacuum deposited aluminum. Photographs of the array were taken in orbit, after exposure to atomic oxygen from December 2000 through December 2001, which indicated that the Kapton[®] blanket had been almost completely oxidized, leaving only the thin largely torn aluminization in place as shown in Figure 3.

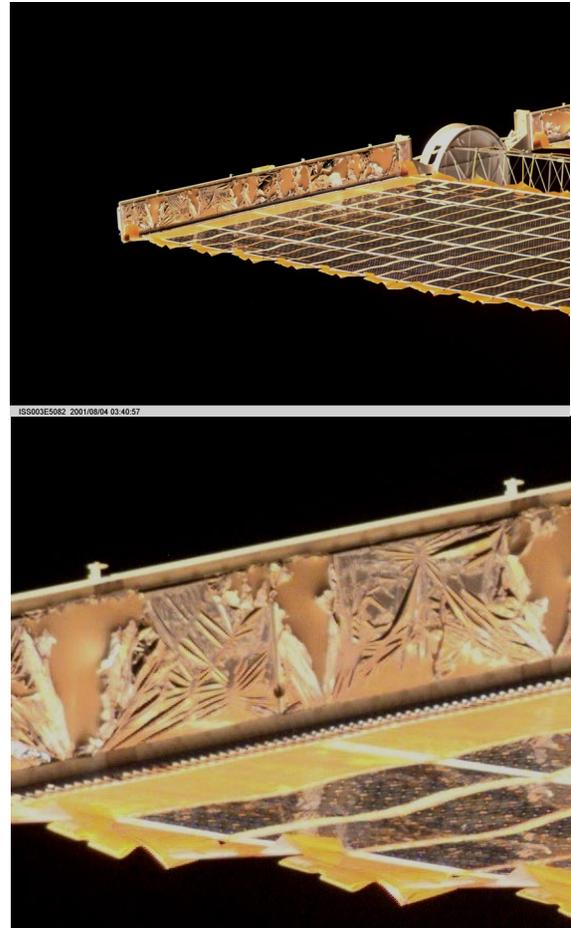


Figure 3. – ISS photovoltaic array blanket box cover after one year in LEO.

ANALYSIS AND DISCUSSION

Surface Roughness and Defect Density

The drastic differences in atomic oxygen protection provided by the same SiO₂ coating filled with 8 percent fluoropolymer on the EURECA retroreflectors and the ISS retroreflectors is thought to be due to drastic differences in the protective coating defect densities. The acrylic EURECA retroreflectors surfaces were extremely smooth as required to produce high fidelity

specular reflections. Such smooth surfaces result in low-defect-density protective coatings that have also been demonstrated, in ground laboratory testing, to perform acceptably. For example, smooth surface (air-cured side) Kapton[®] when coated with 1300 Å thick SiO₂ resulted in ~ 400 pin window defects/cm². However, the same coating on the rougher surface (drum-cured side) has been found to result in 3500 pin window defects/cm².¹ Similar experiences with graphite epoxy composite surfaces formed by casting against another smooth surface produce defect densities of ~262,300 defects/cm².³ Surface leveling polymers applied over such surfaces have been found to reduce the defect densities by an order of magnitude to ~22,000 defects/cm².³

The machining of the Delrin[®] 100 retroreflector mount surfaces produces machine marks or rills in the surface resulting in a highly defected atomic oxygen protective coating. Such rills allow atomic oxygen to oxidize and undercut the high erosion yield Delrin[®] causing the coating to gradually be left as an unattached gossamer film over the retroreflector mount which could be easily torn and removed by intrinsic stresses and thruster plume loads. The use of smoother surfaces, surface-leveling coatings over the machined Delrin[®] or use of alternative atomic oxygen durable materials could potentially eliminate the observed problem.

The double-SiO₂ coated ISS solar array blankets may show similar detachment of the outer surface SiO₂ layer with time. However, the defect density appears to be much lower for SiO₂ coated Kapton[®] than for vacuum deposited aluminum coatings as shown in Figure 4, which compares the experimental results of RF plasma oxidation

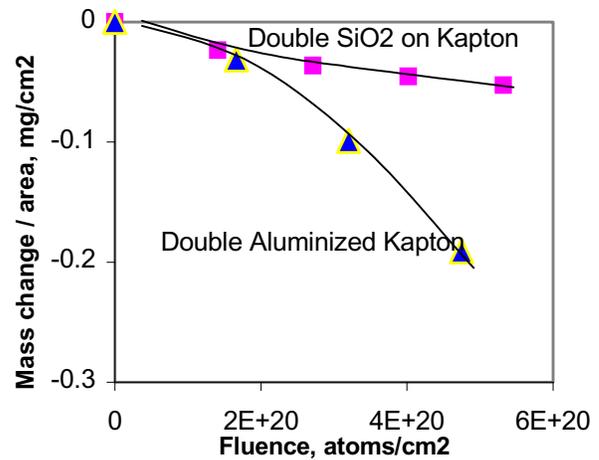



Figure 4. – Comparison of RF plasma oxidation of aluminized and SiO₂ coated Kapton[®].

of double-sided aluminized Kapton[®] with that of double-sided SiO₂ coated Kapton[®].


Figure 5 shows corroboration of the much greater defect density of double aluminized Kapton[®] than that of double SiO₂ coated Kapton[®]. Scanning electron microscopy (SEM) of the two surfaces after atomic oxygen exposure of the materials in ground laboratory RF atomic oxygen plasmas to an atomic oxygen effective fluence of 3.18×10^{20} atoms/cm² followed by tape peeling to remove any unsupported protective coating at defect sites.

As can be seen in Figure 5, the aluminized Kapton[®] shows evidence of far greater number of defect sites than for the SiO₂ protected Kapton[®], where only debris particles are evident on the surface.

Further evidence of the greater number of pin windows in the aluminized coatings can be seen by comparing the water vapor transport through the two protected materials in their pristine condition, as shown in Figure 6.

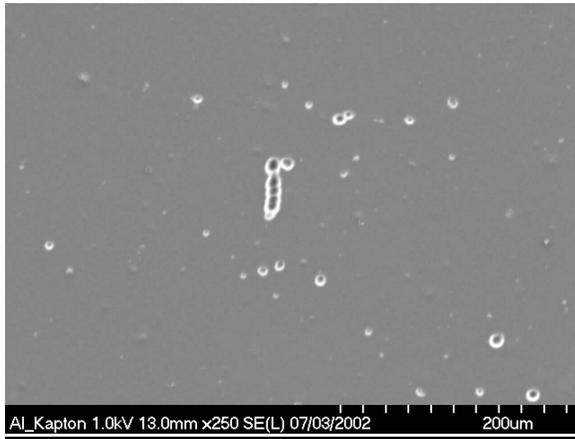

a. Kapton[®] that had been aluminized

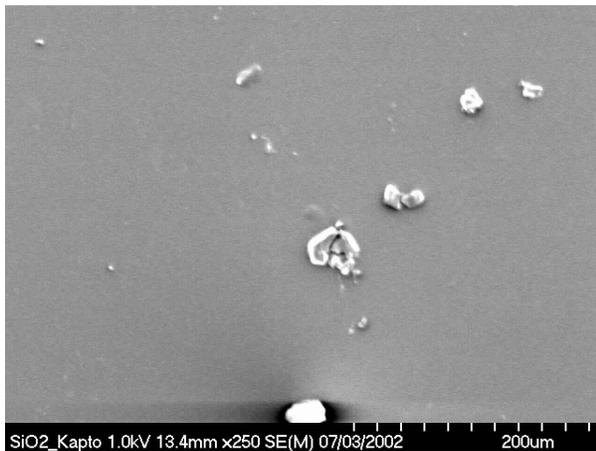

b. SiO₂ protected Kapton[®]

Figure 5. – SEM photos of atomic oxygen exposed ISS PV blanket box cover and ISS PV array coated Kapton[®].

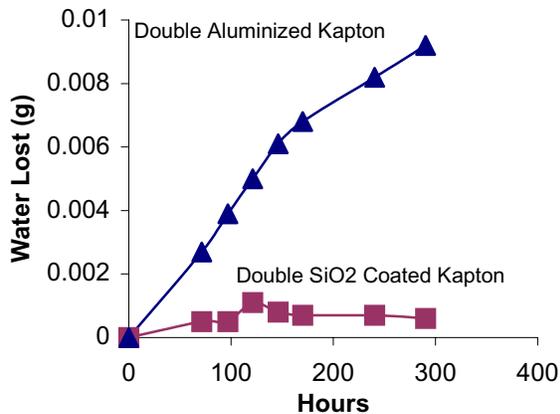


Figure 6. – Water vapor transport rate through protected Kapton[®].

Data for Figure 6 was obtained by measuring the weight loss of water filled Petri dishes which had covers made of the pristine ISS PV blanket box cover and ISS PV array coated Kapton[®] materials. The samples were sealed to the Petri dishes by means of petroleum jelly to minimize moisture loss other than from through the protected polymers. As can be seen there is approximately a factor of 16 greater defect area in the double aluminized Kapton[®] compared to the double SiO₂ coated Kapton[®]. When one considers the greater apparent number of defects as well as the greater area of defects, one is lead to consider that the aluminized Kapton[®] has many more small defects than the SiO₂ coated Kapton[®].

Trapping of Atomic Oxygen Between Defected Protective Surfaces

The lack of atomic oxygen protection provided by the aluminized Kapton[®] blanket cover for the ISS photovoltaic arrays box cushion is thought to be due to the trapping of atomic oxygen between the two aluminized surfaces on the 0.0254 mm thick Kapton[®] blanket. Defects in the space exposed aluminized surface allow atomic oxygen to erode undercut cavities. If the undercut cavity extends downward to the bottom aluminized surface, then the atomic oxygen becomes somewhat trapped and has multiple opportunities for reaction until it either recombines, reacts, or escapes out one of the defects in the aluminization. This eventually results in a complete loss of the Kapton[®] with only the aluminized thin film remaining. The vacuum deposited aluminum has a slight tensile stress that causes stress wrinkling of the unsupported aluminum films. Figure 7 is a photograph of a vacuum deposited aluminized Kapton[®] sample that was placed in a radio frequency plasma environment to completely oxidize the Kapton[®] over a portion of the sample.

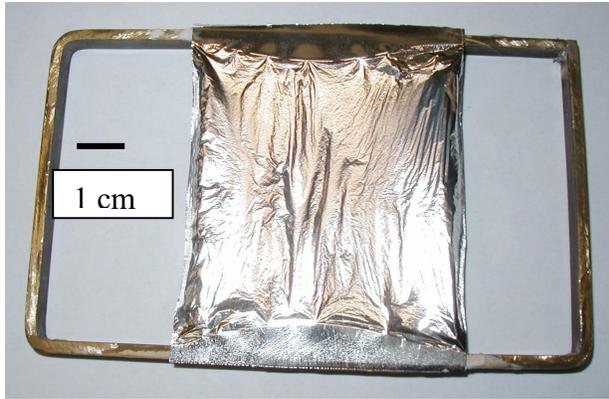


Figure 7. – Photograph of a vacuum deposited aluminized Kapton[®] sample bonded to a metal frame after ground laboratory oxidation of the Kapton[®].

As can be seen in Figure 7, where the ~1000 Angstrom aluminum film in the lower portion of the sample is free standing, stress wrinkles and tears develop similar to those seen in the ISS photograph of Figure 3.

A two dimensional Monte Carlo computational model has been developed which is capable of simulating LEO atomic oxygen attack and undercutting at crack defects in protective coatings over hydrocarbon polymers.⁴ Optimal values of the atomic oxygen interaction parameters, listed in Table 1, were identified by selecting values of the parameters that forced the Monte Carlo computational predictions to match results of protected samples retrieved from the Long Duration Exposure Facility.⁴

These interaction parameters and values were used to predict the consequences of atomic oxygen entering a 2-dimensional crack or scratch defect in the top aluminized surface. This was accomplished using 100,000 Monte Carlo atoms entering a defect which was 20 Monte Carlo cells wide (representing a 13.4 micrometer wide defect) over a 38 cell thick (representing a

Table 1. Computational Model Parameters and Reference Values for LEO Atomic Oxygen Interaction with Kapton[®]

Atomic oxygen initial impact reaction probability	0.11
Activation energy, E_A , in eV for energy dependent reaction probability	0.26
Atomic oxygen probability angle of impact dependence exponent, n , in $(\cos \theta)^n$ angular dependence where θ is the angle between the arrival direction and the local surface normal	0.5
Probability of atomic oxygen recombination upon impact with protective coating	0.13
Probability of atomic oxygen recombination upon impact with polymer	0.24
Fractional energy loss upon impact with polymer	0.28
Degree of specularity as opposed to diffuse scattering of atomic oxygen upon non-reactive impact with protective coating where 1 = fully specular and 0 = fully diffuse scattering	0.4
Degree of specularity as opposed to diffuse scattering of atomic oxygen upon non-reactive impact with polymer where 1 = fully specular and 0 = fully diffuse scattering	0.035
Temperature for thermally accommodated atomic oxygen atoms, K	300
Limit of how many bounces the atomic oxygen atoms are allowed to make before an estimate of the probability of reaction is assigned	25
Thermally accommodated energy/actual atom energy for atoms assumed to be thermally accommodated	0.9
Initial atomic oxygen energy, eV	4.5
Thermospheric atomic oxygen energy, K	1000
Atomic oxygen arrival plane relative to Earth for a Maxwell-Boltzmann atomic oxygen temperature distribution and an orbital inclination of 28.5°	Horizontal

0.0254 mm thick) Kapton[®] blanket. Figure 8 compares the Monte Carlo model computational erosion results for a 45-degree angle of attack (relative to the surface normal) of the atomic oxygen for both double surface-coated Kapton[®] (which was the case for ISS) and single top surface-coated Kapton[®].

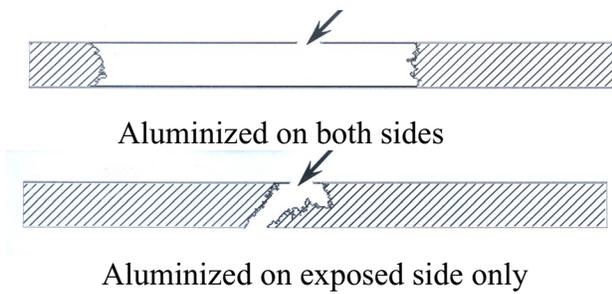


Figure 8. – Monte Carlo computational atomic oxygen erosion predictions for a 45 degree from perpendicular angle of attack of atomic oxygen at a crack or scratch defect in the aluminized Kapton[®] surface.

As can be seen from Figure 8, even though the atomic oxygen gradually becomes less energetic with the number of interactions and has approximately a 13% chance of recombination, the trapped atoms undercut far more in the actual ISS case of a double aluminization as would have occurred if the Kapton[®] was simply aluminized on one side. Thus, contrary to intuition, the use of two atomic oxygen protective coatings rather than a single coating appears to cause more rather than less undercutting attack. The extent of undercutting of trapped atomic oxygen is also dependent on the opportunity for the atoms to lose energy, recombine, or escape back out the defect opening. Figure 9 shows the results of 2-dimensional Monte Carlo computational modeling predictions for a 45-degree angle of attack atomic oxygen on a 13.4 micrometer wide crack or scratch in the protective coating for both single side and double side aluminized Kapton[®].

As can be seen in Figure 6, initially, as the undercutting starts the existence or absence of the back surface coating plays no role and as the cavity grows the probability of atoms reacting increases due to trapping of the incoming atom. However, when the undercutting reaches the bottom surface,

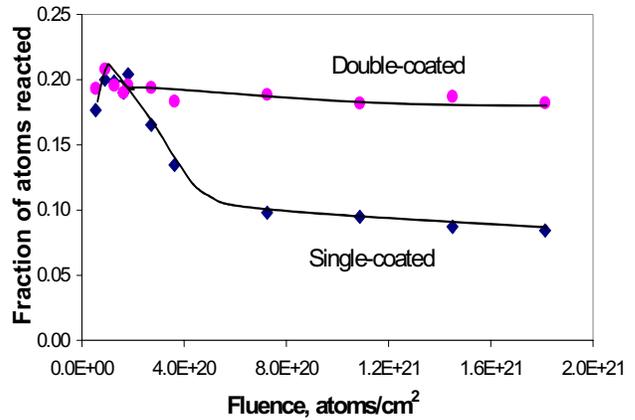


Figure 9. – Computational atomic oxygen erosion predictions for 45-degree incident atomic oxygen attack at crack or scratch defect sites on protected Kapton[®].

atoms arriving at the plane of the bottom can either escape (in the case of no bottom protective coating) or have a chance or scattering with reduction in energy through partial thermal accommodation or recombine (in the case of the a bottom surface protective coating). The modeling indicates that the double surface aluminized Kapton[®] consistently reacts about twice as many atomic oxygen atoms as the single surface aluminized Kapton[®] except at very low fluences where the erosion in either case does not reach the bottom of the polymer. Thus, it appears that a single surface aluminized Kapton[®] would have been much more durable because the unreacted atoms passing through the bottom of the polymer would simply enter into the open pore foam and gradually react with it, without causing much damage to the aluminized Kapton[®].

Based on the data that indicates that the aluminized protective coating may have many small defects, a Monte Carlo computational comparison was made between protective coatings that had the same fractional defect area but varied in the

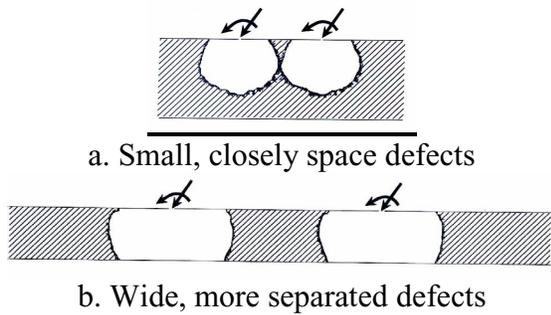


Figure 10. – Monte Carlo predictions comparing the same fractional crack defect areas but different defect sizes.

width of the crack defect in the protective coating. The comparison of resulting undercut cavities is shown in Figure 10 which compares the undercut cavities under LEO sweeping atomic attack conditions. Each configuration was run to the same fluence level.

As can be seen from Figure 10, the undercut cavity for the closely spaced small defects touch each other which would allow the upper portion of the blanket to become detached and even more vulnerable to atomic oxygen attack. However the wide but more separated defected configuration would only have occasional holes in it.

The Monte Carlo computational model can be used to compute the critical atomic oxygen fluence needed to create touching or connecting under cut cavities as a function of defect size for constant fractional defect areas (the ratio of defect area to total surface area). The resulting prediction for fractional defect areas of 0.0257 is shown in Figure 11.

As one can see, the critical fluence, which will allow the upper surface of the blanket to become detached, drops rapidly with defect width for small defects. Thus, if the aluminized surface contains many very small defects, the connection of under cut

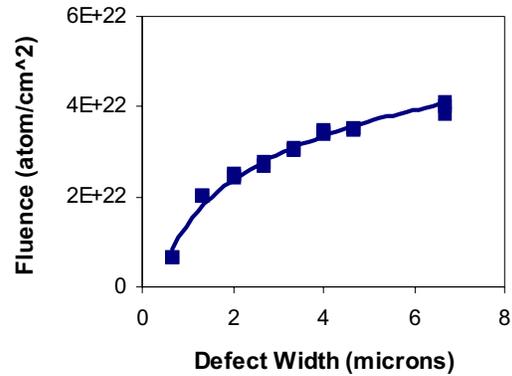


Figure 11. – Computational atomic oxygen prediction of critical fluence for fractional defect areas of 0.0257.

cavities will begin to occur at much lower fluences that if the defects were larger and more separated.

CONCLUSIONS

Atomic oxygen protective coatings have been developed and used in space that performs acceptably. However, rough surface substrates cause defects in the protective coatings that allow atomic oxygen to react and gradually undercut the protective coating. In the case of machined Delrin[®] ISS retroreflector mounts, such roughness has lead to detachment of portions of the protective film covering the retroreflector mount.

Atomic oxygen undercutting of the double aluminized Kapton[®] blanket covers for the ISS photovoltaic array box cushions has occurred resulting in a torn and partially detached aluminum film. Based on computational modeling, and ground laboratory characterization testing, early failure of the aluminized Kapton[®] ISS PV blanket box covers can be caused by excessive atomic oxygen attack resulting

from the presence of many small defects in the aluminization in comparison to many fewer defects in the double SiO₂ coated Kapton[®]. High defect area, defect density and the application of the protective coating to both sides of the aluminized Kapton[®] ISS PV blanket box covers appear to have contributed to the early failure of the covers as indicated by ground laboratory atomic oxygen testing, SEM, moisture transmission and Monte Carlo computational modeling. The use of a protective coating on only the exposed side of the Kapton[®] blanket may increase the durability of the blanket.

REFERENCES

1. S. Rutledge, R. Olle, "Space Station Freedom Solar Array Blanket Coverlay Atomic Oxygen Durability Testing," 38th SAMPE Symposium, May 10–13, 1993.
2. B. Banks, S. Rutledge and M. Cales, "Performance Characterization of EURECA Retroreflectors with Fluoropolymer-Filled SiO_x Protected Coatings," Long Duration Exposure Facility (LDEF) Conference, Williamsburg, Virginia, November 8–12, 1993.
3. K. de Groh, J. Dever and W. Quinn, "The Effect of Leveling Coatings on the Durability of Solar Array Concentrator Surfaces," 8th International Conference on Thin Films and 17th International Conference on Metallurgical Coating," San Diego, California, April 2–6, 1990.
4. B. Banks, T. Stueber, and M. Norris, "Monte Carlo Computational Modeling of the Energy Dependence of Atomic Oxygen Undercutting of Protected Polymers," NASA/TM—1998-207423, Fourth International Space Conference, ICPMSE-4, Toronto, Canada, April 23–24, 1998.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (<i>Leave blank</i>)		2. REPORT DATE August 2002	3. REPORT TYPE AND DATES COVERED Technical Memorandum	
4. TITLE AND SUBTITLE Durability Issues for the Protection of Materials From Atomic Oxygen Attack in Low Earth Orbit			5. FUNDING NUMBERS WU-755-A4-06-00	
6. AUTHOR(S) Bruce Banks, Mary Lenczewski, and Rikako Demko				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191			8. PERFORMING ORGANIZATION REPORT NUMBER E-13524	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-2002-211830 IAC-02-1.5.02	
11. SUPPLEMENTARY NOTES Prepared for the 53rd International Astronautical Congress cosponsored by the International Astronautical Federation (IAF), the International Academy of Astronautics (IAA), and the International Institute of Space Law (IISL), Houston, Texas, October 10-19, 2002. Bruce Banks, NASA Glenn Research Center; Mary Lenczewski, Ohio Aerospace Institute, Brook Park, Ohio 44142; and Rikako Demko, Cleveland State University, Cleveland, Ohio. Responsible person, Bruce Banks, organization code 5480, 216-433-2308.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Category: 18 Available electronically at http://gltrs.grc.nasa.gov This publication is available from the NASA Center for AeroSpace Information, 301-621-0390.			12b. DISTRIBUTION CODE	
13. ABSTRACT (<i>Maximum 200 words</i>) Low Earth orbital atomic oxygen is capable of eroding most polymeric materials typically used on spacecraft. Solar array blankets, thermal control polymers, and carbon fiber matrix composites are readily oxidized to become thinner and less capable of supporting the loads imposed upon them. Protective coatings have been developed that are durable to atomic oxygen to prevent oxidative erosion of the underlying polymers. However, the details of the surface roughness, coating defect density, and coating configuration can play a significant role as to whether or not the coating provides long duration atomic oxygen protection. Identical coatings on different surface roughness surfaces can have drastically different durability results. Examples and analysis of the causes of resultant differences in atomic oxygen protection are presented. Implications based on in-space experiences, ground laboratory testing, and computational modeling indicate that thin film vacuum-deposited aluminum protective coatings offer much less atomic oxygen protection than sputter-deposited silicon dioxide coatings.				
14. SUBJECT TERMS Earth orbital environments; Life; Durability; Oxygen atoms			15. NUMBER OF PAGES 15	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	