NASA/TM—2004-212890

On Orbit Daytime Solar Heating Effects: A Comparison of Ground Chamber Arcing Results

J. Galofaro
Glenn Research Center, Cleveland, Ohio

B. Vayner
Ohio Aerospace Institute, Brook Park, Ohio

D. Ferguson
Glenn Research Center, Cleveland, Ohio

February 2004

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:

- TECHNICAL PUBLICATION. Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.

- TECHNICAL MEMORANDUM. Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.

- CONTRACTOR REPORT. Scientific and technical findings by NASA-sponsored contractors and grantees.

- CONFERENCE PUBLICATION. Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.

- SPECIAL PUBLICATION. Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.

- TECHNICAL TRANSLATION. English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at ***http://www.sti.nasa.gov***

- E-mail your question via the Internet to help@sti.nasa.gov

- Fax your question to the NASA Access Help Desk at 301–621–0134

- Telephone the NASA Access Help Desk at 301–621–0390

- Write to:
  NASA Access Help Desk
  NASA Center for AeroSpace Information
  7121 Standard Drive
  Hanover, MD 21076

NASA/TM—2004-212890

On Orbit Daytime Solar Heating Effects: A Comparison of Ground Chamber Arcing Results

J. Galofaro
Glenn Research Center, Cleveland, Ohio

B. Vayner
Ohio Aerospace Institute, Brook Park, Ohio

D. Ferguson
Glenn Research Center, Cleveland, Ohio

Prepared for the
Eighth Spacecraft Charging Technology Conference
cosponsored by NASA, SEE, AFRL, and ESA
Huntsville, Alabama, October 20–24, 2003

National Aeronautics and
Space Administration

Glenn Research Center

February 2004

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100

Available electronically at http://gltrs.grc.nasa.gov

ON ORBIT DAYTIME SOLAR HEATING EFFECTS: A COMPARISON OF GROUND CHAMBER ARCING RESULTS

J. Galofaro
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135
Phone: 216–433–2294; Fax: 216–433–6106
E-mail: Joel.T.Galofaro@grc.nasa.gov

B. Vayner
Ohio Aerospace Institute
Brook Park, Ohio 44142

D. Ferguson
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Summary

The purpose of the current experiment is to make direct comparisons between the arcing results obtained from the diffusion pumped vertical chamber and our newly renovated Teney vacuum chamber which is equipped with a cryogenic pump. Recall that the prior reported results obtained for the Vertical chamber were nominal at best, showing only a slight reduction in the arc rate after 5 heating cycles at the lower bias potentials and virtually no changes at high potential biases.[1,2] It was concluded that the vertical chamber was unable to remove enough water vapor from the chamber to adequately test the arcing criterion. Because the cryo-pumped Teney chamber has a ten times better pumping speed, (40,000 liters per sec compared to 4,000 liters per sec for the diffusion pumped vertical chamber), a decision was made to retest that experiment in both the Teney and Vertical vacuum chambers. A comparison of the various data is presented with encouraging results.

Introduction

For the current experiments silicon photovoltaic arrays are placed under simulated daytime solar heating (full sunlight) conditions typically encountered in a Low Earth Orbit (LEO) environment. Assuming a 220 km LEO orbit the array will reach a temperature of about 80 °C in full sunlight. It is our contention that a desorbed molecular ionization mechanism involving water vapor, at the triple junction sites on a solar array, is directly responsible for arcing onset of solar arrays in LEO.[3–9] The solar array arcing criterion is used to validate our

hypothesis that the arc rate depends on the water vapor content stored in the array. Because solar heating of the array seeks to drive out absorbed water vapor, a reduction in water vapor should lead to a reduction in the arcing rare. Arc rates are established for individual arrays held at 11 °C and are used as a baseline for further comparisons. As in the previous experiment the arrays were heated to a temperature of 80 °C. Each thermal cycle was set to time duration of 40 minutes to approximate the daytime solar heat flux to the array over a single orbit. The arrays are allowed to cool back down to ambient temperature before proceeding to the next thermal cycle. After 5 complete heating cycles the arc rates of the solar arrays are then retested at a temperature of 11 °C.

Experimental Setup

Figure 1 shows a picture of the 2.2 meter (diameter) by 3.0 meter (length) Vertical Chamber (Left) and the 1.8 meter (diameter) by 2.0 meter (length) of the cryo-pumped Teney vacuum chamber (Right). Figure 2 shows two solar arrays hanging in front of an aluminum plate equipped with resistive heating elements which are used to simulate the solar heat flux to the array. Two type T thermocouples were used to monitor the array and heater plate temperatures. Arrays samples 62 and 63 are each composed of thirty six 4 by 6 centimeter silicon solar cells arranged as 3 parallel strings, each string being composed of 12 cells wired in series. At experiment startup the base neutral background pressure (P_o) in the chamber at 14 °C was recorded at $P_o = 5.7\times10^{-7}$ Torr. A Kaufman plasma source was used to ionize xenon gas neutrals via a hot wire filament for the experiments. In principle xenon gas is carefully metered into the chamber using a user controlled leak valve and an ionization gauge was used to read back the tank pressure. With the xenon gas flowing through the source (source not energized) a tank neutral pressure, $P_o = 4\times10^{-5}$ Torr was established. Initially a programmable power supply source/measure unit (electrometer) is used to monitor electron flux to a Langmuir probe (Lp) which is mounted near the face of the array. A bias of +30V is applied to the Lp relative to tank ground and the current flowing to the surface of the probe is carefully monitored. Next the filament current in the plasma source is gradually increased until the electrometer reads +0.4 milliamps indicating ionization of xenon gas neutrals is occurring and that a plasma is present. The Langmuir probe is swept in voltage to obtain the plasma parameters and the filament current to the plasma source is further adjusted until the Lp diagnostic parameters match the ionospheric conditions for the specified orbit. The plasma electron number densities and electron temperatures measured for the current tests were: $Ne = 4.0\times10^{-5}cm^{-3}$ and Te = 0.89eV, about the same values used the previous arcing tests in the vertical chambers.

For the arcing tests the three strings in each array are shorted and biased negative through a 10k ohm resistor to the a power supply and back to ground through a 1μF capacitor wired in parallel (see fig. 3). A current probe amplifier, current and voltage probes, a four channel 400 MHz digital storage oscilloscope, data acquisition and control software were used to record the arcs. Other miscellaneous equipment used in the tests included a quadruple mass spectrometer to record the levels of partial pressure for water vapor and other species in the vacuum system.

Arc Test Results

A plot of the partial pressure of water in the Vertical chamber, after three forty minute thermal cycles, is plotted in figure 1. The minimum partial pressure for water in the Vertical tank after three hundred hours pumping levels out at approximately 2 microTorr.[2] Therefore it was not necessary to proceed beyond 3 heating cycles for the vertical chamber tests. For comparison purposes note the over all level of reduction in the partial pressure of water is about 20 times less for the Teney vacuum chamber (after five complete thermal cycles) than is case for the Vertical chamber after three thermal cycles (see figs. 4(a) and 4(b)).

Table 1 depicts in tabular form the arcing results obtained for the diffusion pumped vertical chamber and the cryo-pumped Teney vacuum chamber. Figures 5(a) and 5(b) graphically depict the arcing threshold potential (or arc inception voltage) obtained before heating and after thermal cycling for sample 63 (the 300 micron thick cover slide array) tested in the Vertical and Teney vacuum chambers. Similarly figures 5(c) and 5(d) plot the arcing threshold potential before and after thermal cycling obtained for sample 62 (the 150 micron thick cover slide array). Note that the arc inception voltages plotted for the Vertical and Teney vacuum chamber tests of array samples 62 and 63 (figs. 5(a), 5(b), 5(c), and 5(d)) show that the arc inception voltage after heating is much more negative than is the case for the same samples before the arrays were heated.

Conclusions

The results from the thermal cycling tests appear to validate the arcing criterion that was forwarded earlier. The arcing criterion contends that the arc rate should drop as water is outgassed from the array due to heating. More importantly the arc inception voltage seems to be a better prognosticator in determining the effectiveness of thermal cycling on the outgassing of water from the array. In all cases the negative bias potentials recorded for initial arc inception voltage have been driven a great deal more negative after heating compared to the arc inception values recorded earlier before the arrays were heated. Furthermore the trend of lowering arc inception voltages after thermal cycling was observed in both the Vertical and Teney vacuum chamber tests.

As a result of the current measurements the amount of water in the chamber needs to be at or below the 1.6 microTorr minimum level after heating for the observed changes in the arc inception voltage to be seen. The observation of the required 1.6 microTorr level has caused us to rescind our earlier conclusion that the Vertical chamber was unable to remove enough water vapor to adequately test the arcing criterion. A careful reexamination of the data has revealed that the original thermal cycling tests were run in an inconsistent manner with changing plasma source and density parameters.[1, 2] The current tests were retested in the Vertical chamber with the same plasma source parameters, density and pressure set in the original thermal cycling tests of samples 62 and 63 run in the Teney vacuum chamber. Finally we believe we have demonstrated the effectiveness of the thermal cycling technique to passively outgas water from a solar array in an attempt to stave off arcing in LEO.

References

1. B. Vayner, J. Galofaro, and D. Ferguson, “Interactions of High Voltage Solar Arrays with their Physical Environment: Physical Processes,” Journal of Spacecraft and Rockets, to be published in 2004.
2. J. Galofaro, B. Vayner, and D. Ferguson, “Daytime Solar Heating of Photovoltaic Arrays in a Low Density Plasma’s,” 34th AIAA Plasmadynamics and Lasers Conference, June 23–26, 2003, Orlando, FL.
3. B. Vayner, J. Galofaro, D. Ferguson, and W. Degroot, “Conductor-Dielectric Junction in Low Density Plasma,” 38th AIAA Aerospace Sciences Meeting and Exhibit, Jan. 10–13, 2000, Reno, NV.
4. B. Vayner, J. Galofaro, D. Ferguson, W. Degroot, and L. Vayner, “Arcing Onset on a Solar Array Immersed in a Low Density Plasma,” AIAA paper 2001–0400, 39th Aerospace Sciences Meeting and Exhibit, Jan. 8–11, 2001, Reno, NV.
5. B. Vayner, J. Galofaro, and D. Ferguson, “Arc Inception Mechanism on a Solar Array Immersed in a Low-Density Plasma,” NASA/TM—2001-211070, June 2001.
6. J. Galofaro, B. Vayner, W. Degroot, and D. Ferguson, “The Role of Water Vapor and Dissociative Recombination Processes in Solar Array Arc Initiation,” AIAA paper 2002–0938, 40th Aerospace Sciences Meeting and Exhibit, Jan. 14–17, 2002, Reno, NV.
7. B. Vayner, J. Galofaro, D. Ferguson, and W. Degroot, “Electrostatic Discharge Inception on a Height-Voltage Solar Array,” AIAA paper 2002–0631, 40th Aerospace Sciences Meeting and Exhibit, Jan. 14–17, 2002, Reno, NV.
8. J. Galofaro, B. Vayner, D. Ferguson, and W. Degroot, “A Desorbed Gas Molecular Ionization Mechanism for Arcing Onset in Solar Arrays Immersed in a Low-Density Plasma,” AIAA paper 2002–0938, 33rd Plasmadynamics and Lasers Conference, May 20–23, 2002, Maui, HI.
9. B. Vayner, J. Galofaro, and D. Ferguson “The Neutral Gas Desorption and Breakdown on a Metal-Dielectric Junction Immersed in a Plasma,” AIAA paper 2002–244, 33rd Plasmadynamics and Lasers Conference, May 20–23, 2002, Maui, HI.

Table 1.—Summary of arc rate test results for vertical and Teney chambers

	Diffusion Pumped Vertical Chamber				Cryogenic Teney Chamber			
	Strings #1, 2, & 3 (Sample 63) (300 micron thick cover slide)		Strings #4, 5, & 6 (Sample 62) (150 micron thick cover slide)		Strings #1, 2, & 3 (Sample 63) (300 micron thick cover slide)		Strings #4, 5, & 6 (Sample 62) (150 micron thick cover slide)	
	Bias	Arc Rate	Bias	Arc Rate	Bias	Arc Rate	Bias	Arc Rate
Before Heating:	-200 V	0 arcs in 30 minutes	-150 V	0 arcs in 15 minutes	-150 V	1 arc in 30 minutes	-110 V	0 arcs in 30 minutes
	-220 V	2 arcs in 30 minutes	-180 V	0 arcs in 15 minutes	-170 V	0 arcs in 30 minutes	-130 V	8 arcs in 30 minutes
	-240 V	4 arcs in 60 minutes	-200 V	2 arcs in 30 minutes	-200 V	4 arcs in 30 minutes	-150 V	21 arcs in 20 minutes
	-260 V	6 arcs in 30 minutes	-220 V	6 arcs in 38 minutes	-220 V	5 arcs in 30 minutes		
	-280 V	20 arcs in 30 minutes	-240 V	21 arcs in 30 minutes	-240 V	7 arcs in 30 minutes		
After Heating:	-220 V	0 arcs in 30 minutes	-200 V	0 arcs in 30 minutes	-150 V	0 arcs in 30 minutes	-150 V	1 arc in 30 minutes
	-240 V	0 arcs in 15 minutes	-240 V	4 arcs in 30 minutes	-170 V	0 arcs in 15 minutes	-170 V	0 arcs in 20 minutes
	-260 V	0 arcs in 20 minutes	-260 V	25 arcs in 20 minutes	-200 V	4 arcs in 30 minutes	-200 V	4 arcs in 30 minutes
	-280 V	0 arcs in 20 minutes	-270 V	15 arcs in 10 minutes	-220 V	5 arcs in 15 minutes	-220 V	9 arcs in 30 minutes
	-300 V	7 arcs in 30 minutes			-240 V	15 arcs in 5 minutes		
	-320 V	17 arcs in 30 minutes						
	-340 V	29 arcs in 30 minutes						

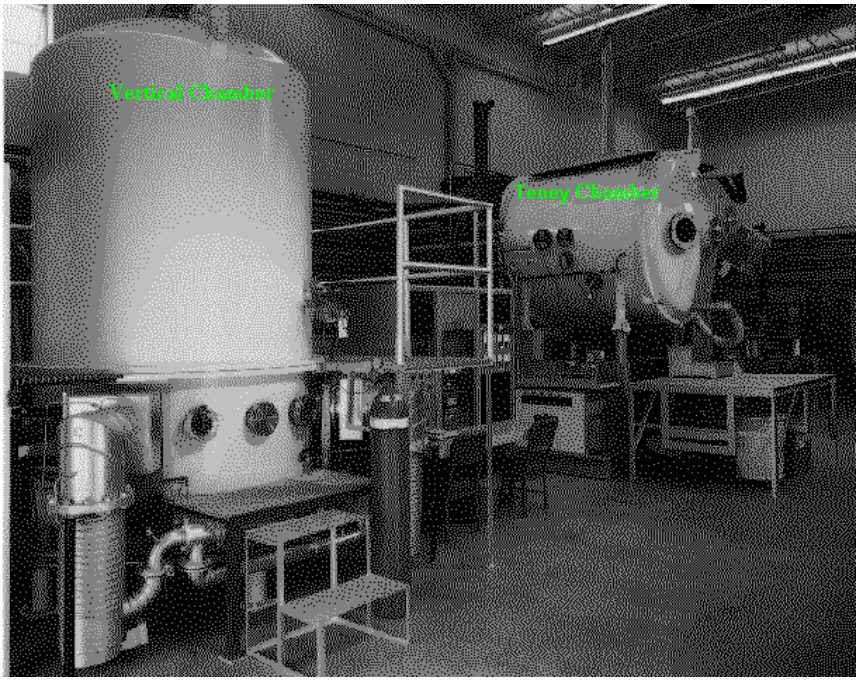

Figure 1.—NASA Glenn plasma interaction facility showing the 2.2×3 meter vertical chamber and the 1.8×2 meter Teney chamber.

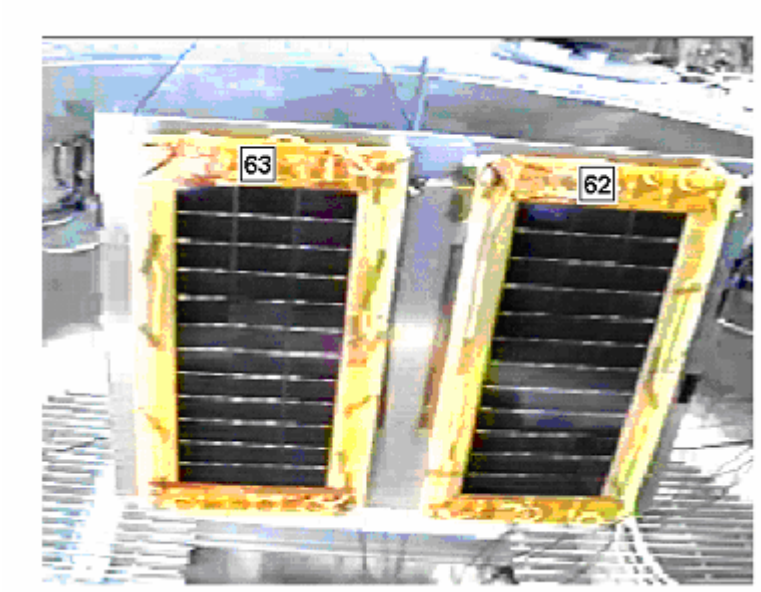

Figure 2.—Solar array samples and the heater plate assembly mounted in the vertical chamber prior to test.

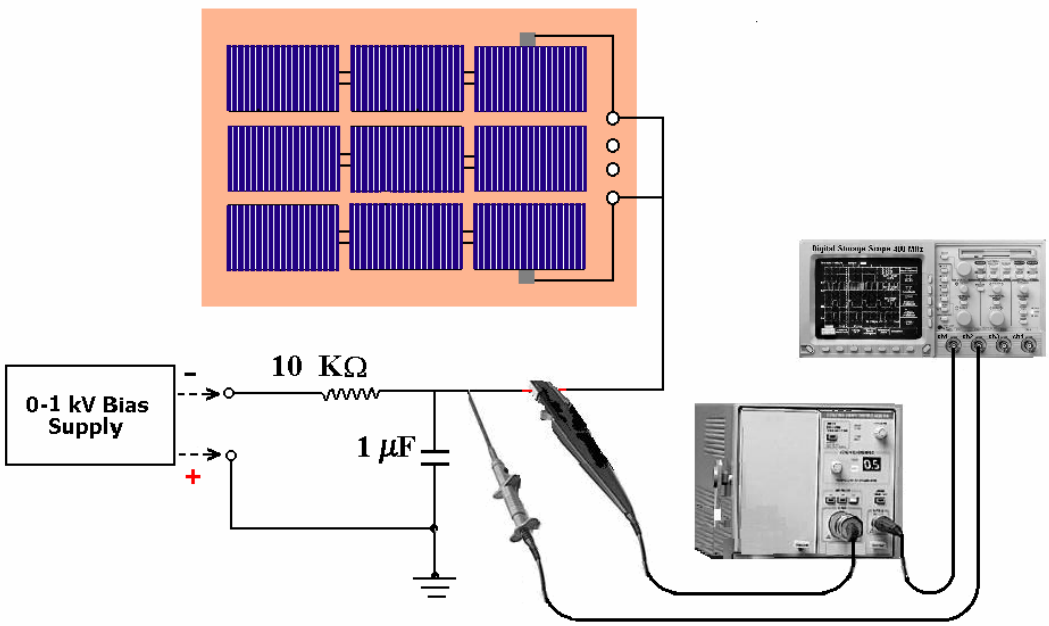

Figure 3.—R-C circuit and hardware used for detecting arcs on solar arrays.

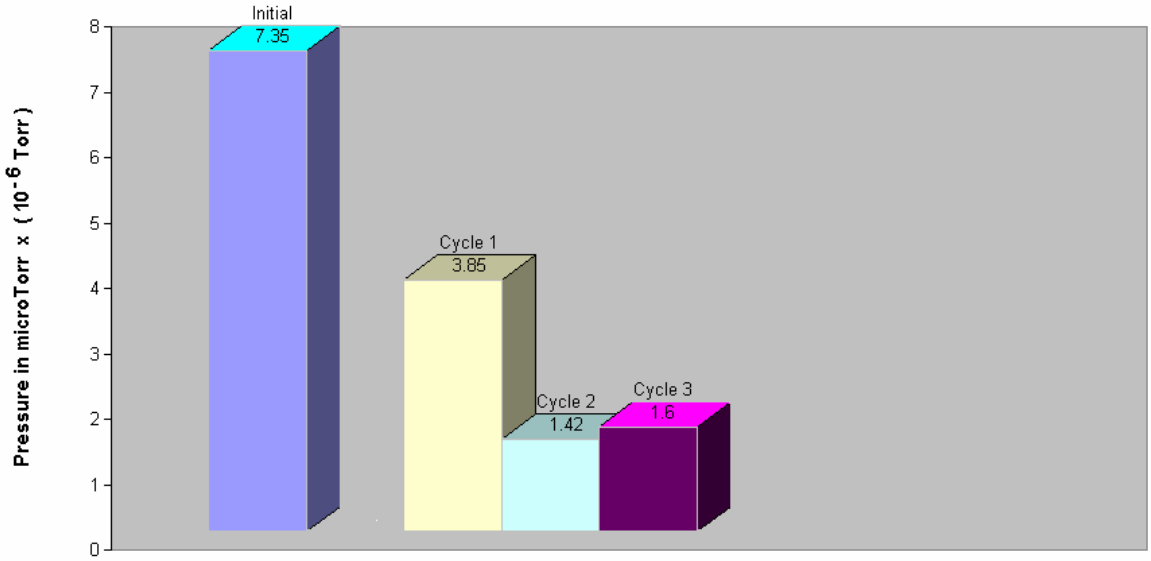

Figure 4(a).—Partial pressure of water in the vertical chamber after each heating cycle. The recorded pressures were obtained after the arrays cooled down to 11 °C.

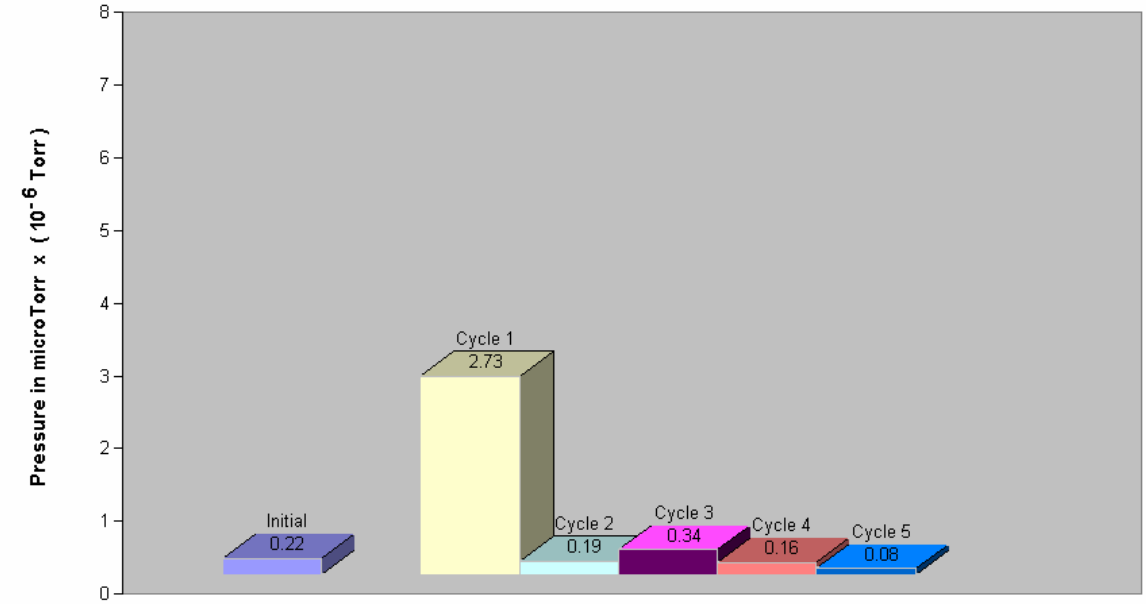

Figure 4(b).—Partial pressure of water in the Teney vacuum chamber after each heating cycle. The recorded pressures were obtained after the arrays cooled down to 11 °C.

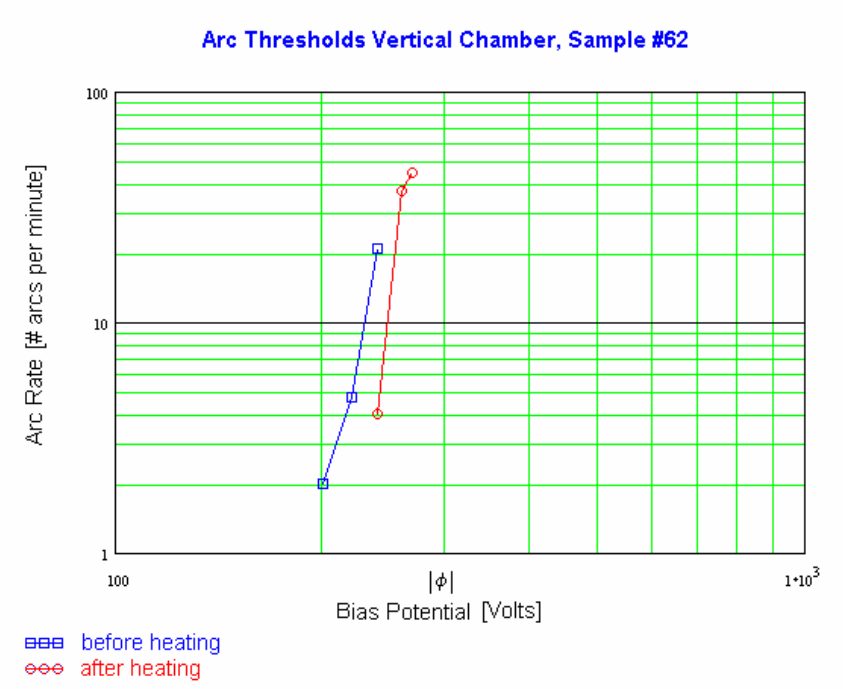

Figure 5(a).—Arc inception voltage before and after 3 heating cycles.

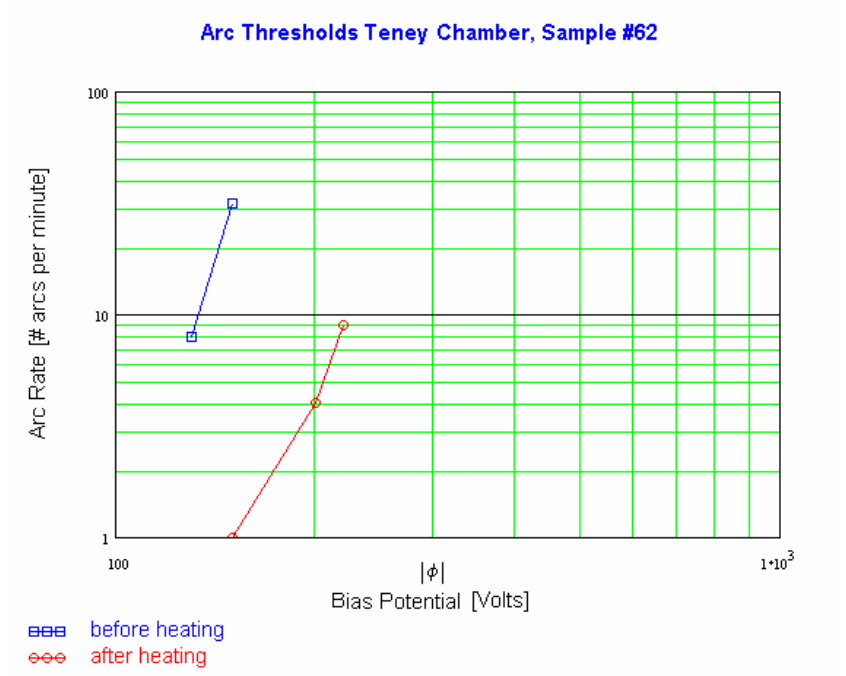

Figure 5(b).—Arc inception voltage before and after 5 heating cycles.

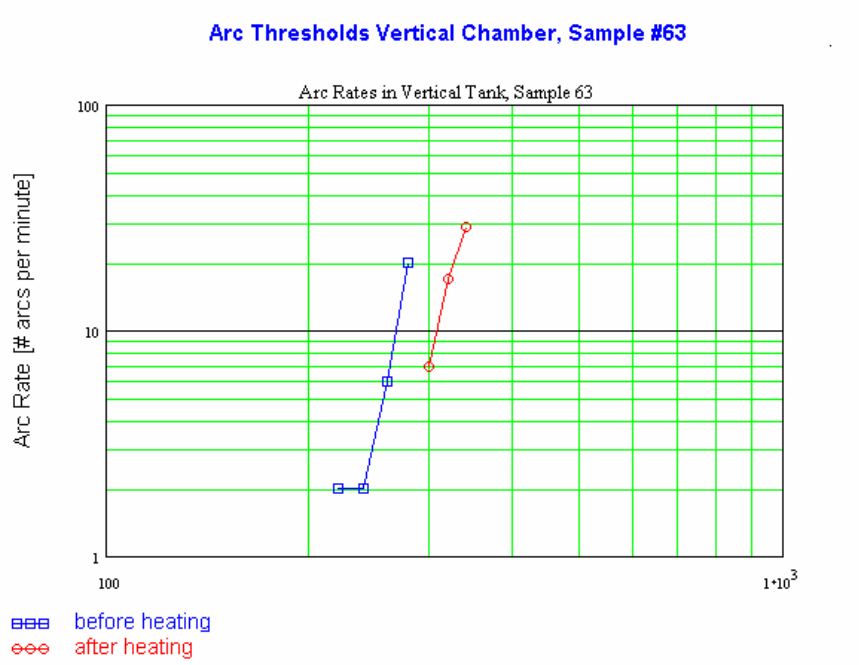

Figure 5(c).—Arc inception voltage before and after 3 heating cycles.

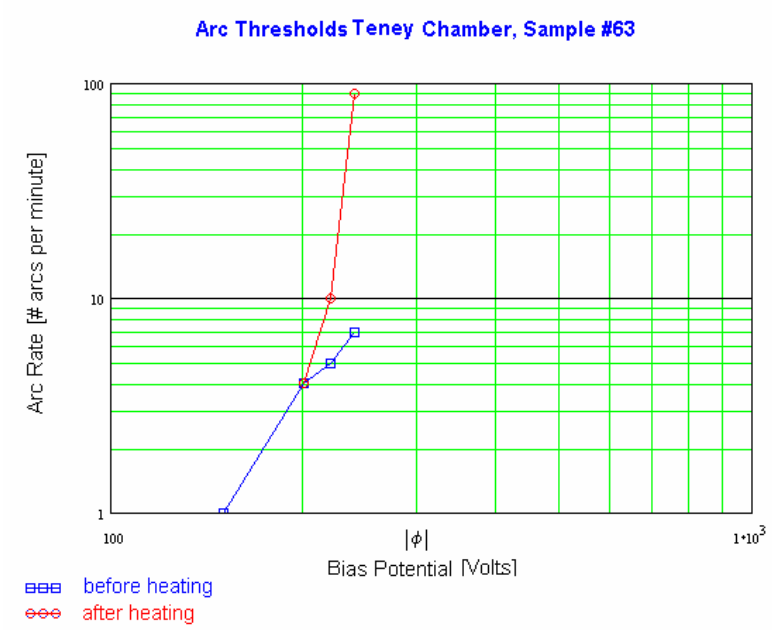

Figure 5(d).—Arc inception voltage before and after 5 heating cycles.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (*Leave blank*)

2. REPORT DATE
February 2004

3. REPORT TYPE AND DATES COVERED
Technical Memorandum

4. TITLE AND SUBTITLE
On Orbit Daytime Solar Heating Effects: A Comparison of Ground Chamber Arcing Results

5. FUNDING NUMBERS
WBS–22–319–20–D1

6. AUTHOR(S)
J. Galofaro, B. Vayner, and D. Ferguson

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)
National Aeronautics and Space Administration
John H. Glenn Research Center at Lewis Field
Cleveland, Ohio 44135–3191

8. PERFORMING ORGANIZATION REPORT NUMBER
E–14308

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)
National Aeronautics and Space Administration
Washington, DC 20546–0001

10. SPONSORING/MONITORING AGENCY REPORT NUMBER
NASA TM—2004-212890

11. SUPPLEMENTARY NOTES
Prepared for the Eighth Spacecraft Charging Technology Conference cosponsored by NASA, SEE, AFRL, and ESA, Huntsville, Alabama, October 20–24, 2003. J. Galofaro and D. Ferguson, NASA Glenn Research Center; and B. Vayner, Ohio Aerospace Institute, Brook Park, Ohio 44142. Responsible person, J. Galofaro, organization code 5410, 216–433–2294.

12a. DISTRIBUTION/AVAILABILITY STATEMENT
Unclassified - Unlimited
Subject Category: 18 Distribution: Nonstandard
Available electronically at http://gltrs.grc.nasa.gov
This publication is available from the NASA Center for AeroSpace Information, 301–621–0390.

12b. DISTRIBUTION CODE

13. ABSTRACT ***(Maximum 200 words)***

The purpose of the current experiment is to make direct comparisons between the arcing results obtained from the diffusion pumped vertical chamber and our newly renovated Teney vacuum chamber which is equipped with a cryogenic pump. Recall that the prior reported results obtained for the Vertical chamber were nominal at best, showing only a slight reduction in the arc rate after 5 heating cycles at the lower bias potentials and virtually no changes at high potential biases. It was concluded that the vertical chamber was unable to remove enough water vapor from the chamber to adequately test the arcing criterion. Because the cryo-pumped Teney chamber has a ten times better pumping speed, (40,000 liters per sec compared to 4,000 liters per sec for the diffusion pumped vertical chamber), a decision was made to retest that experiment in both the Teney and Vertical vacuum chambers. A comparison of the various data is presented with encouraging results.

14. SUBJECT TERMS
Arcing; Solar array arcing; Outgassing; Water vapor; Desorbed gas; Ionization mechanism

15. NUMBER OF PAGES
15

16. PRICE CODE

17. SECURITY CLASSIFICATION OF REPORT
Unclassified

18. SECURITY CLASSIFICATION OF THIS PAGE
Unclassified

19. SECURITY CLASSIFICATION OF ABSTRACT
Unclassified

20. LIMITATION OF ABSTRACT